



Electrochemical Gas Detection Module

**User's Manual V1.0
(Model: ZE03-DG)**

Valid from: 2017-02-17

Zhengzhou Winsen Electronics Technology Co., Ltd

Statement

This manual copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our product. In order to let customers use it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes ...etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in order to get help if you have questions during the usage in the future.

Zhengzhou Winsen Electronics Technology CO., LTD

Electrochemical Detection Module ZE03-DG

The ZE03-DG electrochemical module adopts electrochemical gas sensor and high-performance micro-processor. By installing ME-DG gas sensor to measure the odor concentration. It is with built-in temperature sensor to make temperature compensation, which makes it could detect the gas concentration accurately. It has the digital output and analog voltage output at the same time which facilitates the usage and calibration and shorten the development period. It is a combination of mature electrochemical detection principle and sophisticated circuit design, to meet customers' different detection needs.

Features

High sensitivity & resolution
 Low power consumption
 UART and analog voltage output
 Good stability and excellent anti-interference ability



Main Application

It is widely used in portable and fixed gas detectors and occasions and equipment for detecting odors in public toilets and farms.

Technical Parameters

Model No.	ZE03-DG
Target Gas	peculiar smell
Measurement Range	Refer stable 2.(can be customized also)
Working Voltage	DC 5±0.1V
Working Current	< 5 mA
Output Data	UART Output (TTL electrical level,3V)
	Analog Voltage (refer stable2. for sensor original amplifying signal)
Zero point drift	≤ 1% FS
Working Life	2 years
Operating Environment	Temp.: -20~50℃
	Humidity.: 15%-90%RH(no condensation)
Storage Environment	Temp.: 20~25℃
	Hum.: 30%RH-70%RH
Size	Ø23.5mm*24.5mm

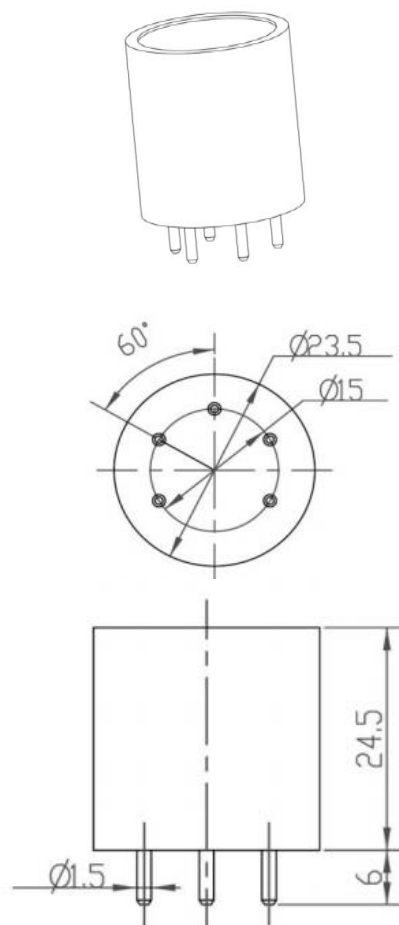


Fig1. Structure(tolerance ±0.25mm)

Detection range and signal output stable2.

Detection gas	peculiar smell
Detection range	(0-50)ppm
Resolution	0.01ppm
VO Voltage output Range	(0.6-3) V
Response Time(T90)	≤90S

Left side value of detection range (zero point) is corresponding to left side value of voltage output range ,but right side value of detection(max detection value) is NOT corresponding to the right side value of voltage output range. 0ppm is corresponding to 0.6V, but the corresponding value of 50ppm should subject to the measured data on inspection report or the provided EXCEL form, not 3V.

Pin definition stable3.

GND	Ground
VCC	Power supply
VO	Original Voltage output
RXD	Series port input
TXD	Series port output




Fig2.Bottom view

The meaning of VO (Vout) : It means original voltage (linear) after amplifying circuit, rather than concentration value of current target gas in environment. If choose this pin test, users need to keep us informed when purchase, thus zero voltage Vout0 and test voltage Vout1 can be shown in the inspection report delivered to customer with the modules together. Users can calculate gas concentration of current target gas in environment based on Vout0 and Vout1. For example: zero voltage Vout0 = 0.6 V; in 50ppm gas,Vout1=2.5V, If the current voltage Voutx=1.2V, then the gas concentration:

$$N = \frac{50}{V_{out1} - V_{out0}} * (V_{outx} - V_{out0}) = 15.79 \text{ ppm}$$

Communication Protocol

1.General Settings

Baud Rate	9600
Data Bits	8 bytes
Stop Bits	1 byte
check bits	Null

2.Communication Specification

The default communication type is active upload and it sends gas concentration once every second (the concentration is 16 hexadecimal). If you want to switch to Q&A mode, please send 0x78 command, to change communication mode to 0x04(Q&A mode), then current concentration will be sent by module after it receiving 0x86 command (reading concentration), suggested communication cycle is 1s.

3.Communication Commands

The default mode is active upload mode, the sensor will send gas concentration actively as follow without sending any command by users.

Receive	0	1	2	3	4	5	6	7	8
	Start byte	Command	Gas concentration		--	--	--	--	Checksum
	0xFF	0x86	High byte	Low byte	0	0	0	0	7A
EXP.	FF 86 00 00 00 00 00 00 7A (concentration is 0)								

gas concentration=(High byte*256+Low byte)*resolution.

0X78—to switch the communicate mode (0x03 is active upload mode, 0x04 is Q&A mode)

1	0x78	To change communication mode							
Send	0	1	2	3	4	5	6	7	8
	Start Byte	Address	Demand	Communication Type	--	--	--	--	Checksum
	0xFF	0X01	0x78	0x03	0	0	0	0	0x84
EXP.	FF 01 78 03 00 00 00 00 84 (switch to active upload type)								
Receive	0	1	2	3	4	5	6	7	8
	Start Byte	Command	Return calibration	--	--	--	--	--	Checksum
	0xFF	0X78	Success: 1 Failure: 0	0	0	0	0	0	0x87
EXP	FF 78 01 00 00 00 00 00 87								

If switch to Q&A mode, send FF 01 78 04 00 00 00 00 83(hexadecimal).

0x86 — To read the concentration value (This command is needed just under Q&A mode.)

1	0x86	To read concentration							
Send	0	1	2	3	4	5	6	7	8
	Start Byte	Address	Command	--	--	--	--	--	Checksum
	0xFF	0X01	0x86	0	0	0	0	0	0x79
EXP.	FF 01 86 00 00 00 00 00 79								
Receive	0	1	2	3	4	5	6	7	8
	Start Byte	Command	Gas Concentration		--	--	--	--	Checksum
	0xFF	0X86	High byte	Low byte	0	0	0	0	7A
EXP.	FF 86 00 00 00 00 00 00 7A (concentration value is 0)								

gas concentration=(High byte*256+Low byte)*resolution

Please note that in the calculation formula, the High byte and Low byte means the decimalism value changed from hexadecimal.

4.Checksum and calculation

```
/******  
* Function Name: ucharFucCheckSum (uchar *i,ucharIn)  
* Functional description: checksum 【Non(sending/receiving commend  
Byte1+Byte2+...Byte7) +1】  
  
*****/  
  
unsigned char FucCheckSum(unsigned char *i,unsigned char In)  
{  
    unsigned char j,tempq=0;  
    i+=1;  
    for(j=0;j<(In-2);j++)  
    {  
        tempq+=*i;  
        i++;  
    }  
    tempq=(~tempq)+1;  
    return(tempq);  
}
```

Cautions

1. Please do not take away or plug the sensor in the module.
2. It is prohibited to weld the pins of the module. The socket could be welded.
3. Sensor shall avoid organic solvent, coatings, medicine, oil and high concentration gases.
4. Excessive impact or vibration should be avoided.
5. Please keep the modules warming up for at least 5 minutes when first using.
6. Please do not use the modules in systems which related to human being's safety.
7. Please do not use the modules in strong air convection environment.
8. Please do not expose the modules in high concentration organic gas for a long time.
9. Returned data of module serial port is real-time concentration of current target gas in environment, If you don't have standard gas, please do not use standard command, for it will cause calibrated data is clear away and returned data of serial port is not accurate.
10. To judge whether module communication is normal, it is advisable to use tools that can change USB to TTL(communication level 3V), debug assistant software via serial port, and determine it by communication protocol.

11. When choosing module, users should choose products of different applications and ranges. If there is no special requirement, products will use conventional range.

Zhengzhou Winsen Electronics Technology Co., Ltd

Add: No.299, Jinsuo Road, National Hi-Tech Zone,
Zhengzhou 450001 China

Tel: +86-371-67169097/67169670

Fax: +86-371-60932988

E-mail: sales@winsensor.com

Website: www.winsen-sensor.com