


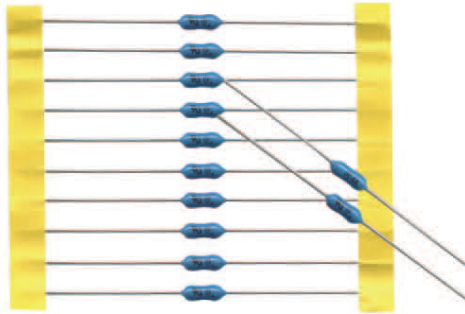

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证					REFERENCE (A²·Sec.) (RoHS) I²T 参考值
		CCC	UL(cUL)	UR(cUR)	CSA	PSE	
20N-0100H/L							
20N-0125H/L	125mA		●	●	●	●	0.0009489
20N-0160H/L	160mA		●	●	●	●	0.002313
20N-0200H/L	200mA		●	●	●	●	0.002719
20N-0250H/L	250mA	●	●	●	●	●	0.005643
20N-0300H/L	300mA		●	●	●	●	0.008507
20N-0315H/L	315mA	●	●	●	●	●	0.009699
20N-0375H/L	375mA		●	●	●	●	0.01937
20N-0400H/L	400mA	●	●	●	●	●	0.01841
20N-0500H/L	500mA	●	●	●	●	●	0.03792
20N-0600H/L	600mA	●	●	●	●	●	0.03965
20N-0630H/L	630mA	●	●	●	●	●	0.04021
20N-0700H/L	700mA		●	●	●	●	0.07328
20N-0750H/L	750mA		●	●	●	●	0.08122
20N-0800H/L	800mA	●	●	●	●	●	0.1002
20N-010H/L	1A	●	●	●	●	●	0.4457
20N-012H/L	1.2A		●	●	●	●	0.2627
20N-013H/L	1.25A	●	●	●	●	●	0.3341
20N-015H/L	1.5A		●	●	●	●	0.5409
20N-016H/L	1.6A	●	●	●	●	●	0.5568
20N-020H/L	2A	●	●	●	●	●	1.038
20N-023H/L	2.25A		●	●	●	●	1.076
20N-025H/L	2.5A	●	●	●	●	●	1.899
20N-030H/L	3A		●	●	●	●	2.851
20N-032H/L	3.15A	●		●	●	●	2.049
20N-035H/L	3.5A			●	●	●	2.704
20N-040H/L	4A	●		●	●	●	3.666
20N-050H/L	5A	●		●	●	●	6.102
20N-060H/L	6A			●	●	●	6.802
20N-063H/L	6.3A			●	●	●	8.075
20N-070H/L	7A			●	●	●	10.18
20N-080H/L	8A			●	●	●	16.21
20N-090H/L	9A			●	●	●	18.77
20N-100H/L	10A			●	●	●	25.54
20N-120H/L	12A			●	●	●	50.89
20N-150H/L	15A			●	●	●	68.28
20N-200H/L	20A			●	●	●	147.1

● DENOTES FOR APPROVED

● 表示已取得安全认证

H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V 100mA-10A)


L DENOTES FOR 72V (L 代表 72V 12A-15A), L DENOTES FOR 60V (L 代表 60V 20A)

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	20 seconds Max. 最慢 20 秒

PACKING/ 包装:

1. INNER BOX/ 内盒: AMMO PACK

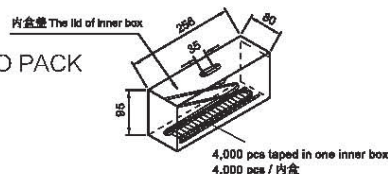

Unit 单位: mm

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON
CARTON SIZE / 尺寸: L440x W270 x H230(mm)



Φ2.4x7mm, RoHS Compliant & Pb-Free MICROFUSE (VERY QUICK-ACTING) 微型保险丝管 (特快熔断型)

INTERRUPTING CAPACITY / 分断能力:

50 amperes at 125V AC (100mA-3A), 50 amperes at 250V AC (375mA-3A)

30 amperes at 125V AC (3.15A-10A)


30 amperes at 250V AC (100mA-350mA, 3.15A-10A)

30 amperes at 72V AC (12A-15A), 50 amperes at 60V DC (20A)

100 amperes at 125V AC (1A-5A) PSE, 50 amperes at 125V DC (250mA-5A) CCC

50 amperes at 125V DC (100mA-3A) UL/cUL, 50 amperes at 125V DC (3.15A-10A) UR/cUR

Dimensions/ 尺寸:

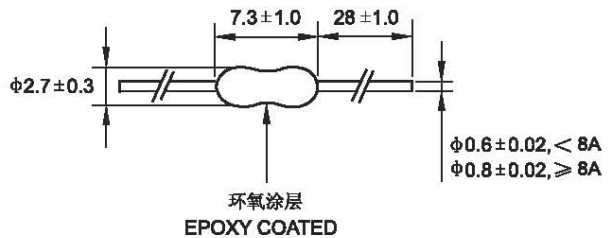

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

20N AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

20N 平均 I-T 曲线图 (仅供参考)

