

JSKT057/JSKH057

Description:

- 1) A package of series of two chips.
- 2) With high thermal conductivity DBC as the insulation.
- 3) Welding by vacuum welding technology, which provide high reliability.



Typical Application:

DC motor control, temperature control and light control system.

Absolute Maximum Ratings (Packaged into modules, unless otherwise specified, $T_{CASE}=25^{\circ}C$)

Parameter	Test Conditions	Symbol	Values	Unit
Operating junction temperature range		T_j	-40-125	$^{\circ}C$
Repetitive peak off-state voltage	$T_j=25^{\circ}C$	V_{DRM}	1600/1800/2000	V
Repetitive peak reverse voltage	$T_j=25^{\circ}C$	V_{RRM}	1600/1800/2000	V
Average on-state current	$T_C=80^{\circ}C$	$I_{T(AV)}/I_{F(AV)}$	57	A
Peak on-state surge current	$t_p=10ms$ $V_R=0.6V_{RRM}$	I_{TSM}/I_{FSM}	1250	A
I^2t value for fusing	$t_p=10ms$ $V_R=0.6V_{RRM}$	I^2t	7800	A^2s
Critical rate of rise of on-state current	$V_D=2/3V_{DRM}$ $t_p=200\mu s$ $I_G=0.3A$, $T_j=125^{\circ}C$ $dI_G/dt=0.3A/\mu s$	dI/dt	150	$A/\mu s$
Insulation voltage	A.C 50Hz(1min)	V_{ISO}	3000	V

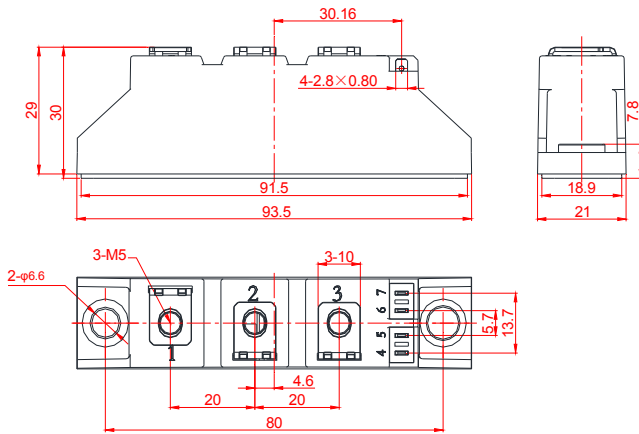
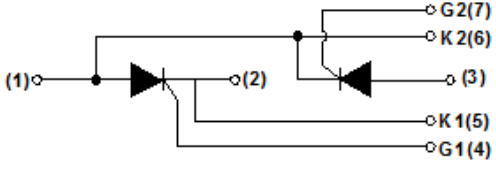
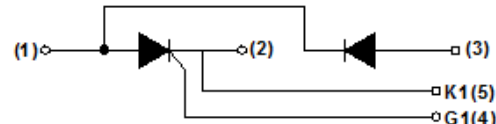
Electrical Characteristics (Packaged into modules, unless otherwise specified, $T_{CASE}=25^{\circ}C$)

Parameter	Test Conditions	Symbol	Values	Unit
Peak on-state voltage	$I_T=175A$ $t_p=380\mu s$	V_{TM}	≤ 1.8	V
Repetitive peak off-state current	$V_D=V_{DRM}$ $T_C=25^{\circ}C$	I_{DRM1}	≤ 50	μA
	$T_C=125^{\circ}C$	I_{DRM2}	≤ 10	mA
Repetitive peak reverse current	$V_R=V_{RRM}$ $T_C=25^{\circ}C$	I_{RRM1}	≤ 50	μA
	$T_C=125^{\circ}C$	I_{RRM2}	≤ 10	mA
Triggering gate current	$V_D=12V$ $R_L=30\Omega$	I_{GT}	10-80	mA
Holding current	$I_T=1A$	I_H	≤ 100	mA



Latching current	$I_G=1.2 I_{GT}$	I_L	≤ 120	mA
Triggering gate voltage	$V_D=12V R_L=30\Omega$	V_{GT}	≤ 1.3	V
Non triggering gate voltage	$V_D=V_{DRM} T_j=125^\circ C$	V_{GD}	≥ 0.25	V
Critical rate of rise of voltage	$V_D=2/3 V_{DRM} T_j=125^\circ C$ Gate Open	dV/dt	≥ 1000	V/ μs
Thermal resistance	Junction to base plate Case to heatsink	$R_{th(j-b)}$ $R_{th(c-s)}$	0.48 0.22	K/W

Mechanical Characteristics

Module size	93.5×21mm
Module height	30mm
Terminal distance of (1)/(2)/(3)	20mm
The main current terminal connecting torque	3-M5
Device fixing torque	M5
 <p style="text-align: center;">T1</p>	 <p style="text-align: center;">JSKT symbol</p>  <p style="text-align: center;">JSKH symbol</p>

Instructions and Precautions

- 1) There is no severe vibration and shock in operating environment, and there should be no impurity and atmosphere which may corrode metal and damage the insulation in the air-dielectric.
- 2) The operating condition of the product can't out of range of the above parameters.
- 3) When the product is installed on the radiator, the radiator's surface should be confirmed flat, smooth, wipe clean with alcohol, and coated evenly with a layer of thermal grease which thickness is moderate on the contact surface between product and radiator. When the module is fastened on the surface of the radiator, the M5 or M6 screws and spring washers are used and fastened with 5NM torque. After the module is operated 1 hour, all screws must be refastened.
- 4) The connection with the main electrode of module can use copper, welding, socket and so on. The contact surface should be smooth and flat, which make good contact. While the connection with the control electrode of module is installed, attention should be paid to the corresponding connection of each pin. After the completion of the connection, do not plug and pull out the lead of the control electrode freely.



Ordering Information

	<u>JS</u>	<u>KT</u>	<u>057</u>	<u>-16</u>
JieJie Semiconductor Co.,Ltd				16: $V_{DRM}/V_{RRM} \geq 1600V$
	KT: Thyristor module			18: $V_{DRM}/V_{RRM} \geq 1800V$
	KH: Thyristor and diode module		$I_{T(AV)}/I_{F(AV)}=57A$	20: $V_{DRM}/V_{RRM} \geq 2000V$