

CUSTOMER APPROVE BY:

130.0

4.0

4.0

front

44.0

side


1.3

20.0

back

20.0

10.5

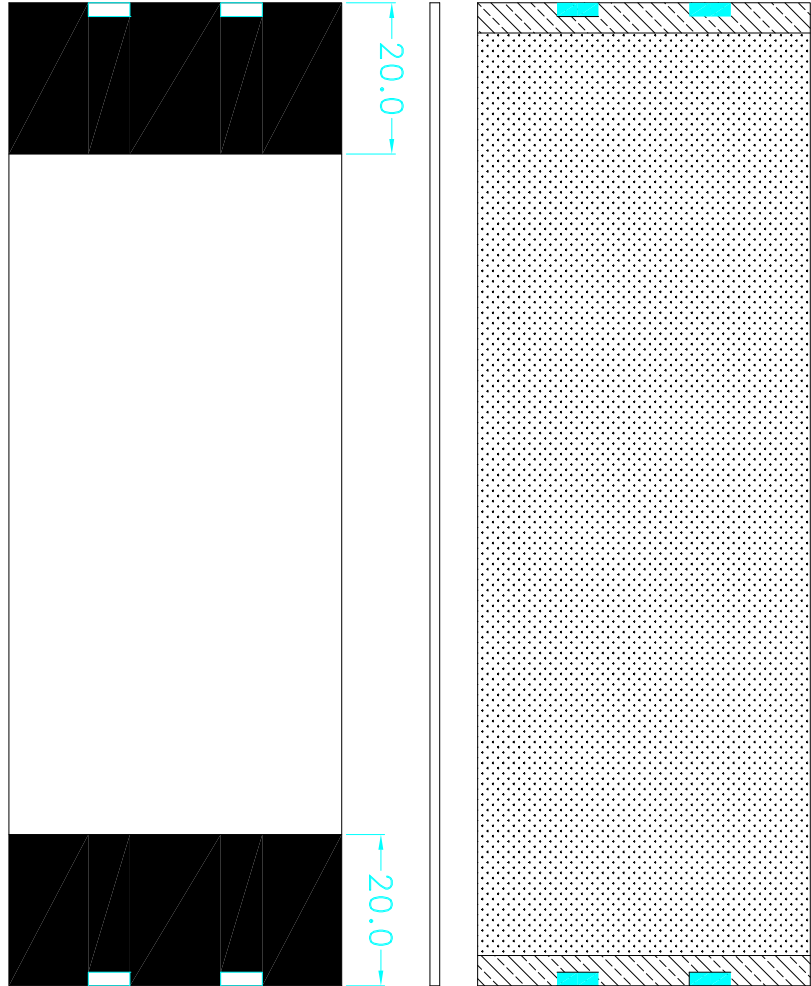

gap

gap

- CHARACTERISTICS :
- 1.Opcs LED
 - 2.Color : white
 - 3.IF: 0mA

- 4.uniformity Luminous Uniformity : $\geq 75\%$
- 5.Storage Temperature Range : -25°C TO $+75^{\circ}\text{C}$
- 6.Operating Temperature Range : -20°C TO $+70^{\circ}\text{C}$
- 7.Unspecified Tolerances is : $\pm 0.3\text{mm}$

电性参数 (Test Datasheet on led backlight):

Item	Symbol	min.	typ.	max.	Unit	TEST COND.
???	Vf	2.8	3.0	3.2	V	IF=20mA
???	Ir			10	μA	VR=5V
??	WD				nm	IF=20mA
??	Lv				cd/m ²	IF=20mA


5					
4					
3					
2					
1					

Pro. Mode	74819	backlight	Drawing Name	LED backlight drawing
SIZE	Tolerance	Draw. BY	greg	2017.12.22
L < 15	± 0.10	Chec. BY	江金廷	
15 $\leq$ L < 100	± 0.20	Appr. BY	DAVIS	
100 $\leq$ L < 150	± 0.25	Scale		
Proj. Rule(3)	1 : 1	Drawing NO.		
		Version		A

DISPLAYBLY.com

香港布萊克科技有限公司
DISPLAYBLY (HK) TECHNOLOGY CO., LIMITED

电路图Circuit Diagram:



ALF(遮光区)

E.L.A(发光区)

D.S.T(双面胶)