

规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客 户: _____

PRODUCT 产 品: _____ SAW FILTER _____

MODEL NO 型 号: _____ HDF770A SMD-4 _____

MARKING 印 字: _____ HDF4732 _____

PREPARED 编 制: 王 岩 岩 CHECKED 审 核: 邓 攀

APPROVED 批 准: 胡 明 华 D A T E 日 期: _____ 2010-7-6 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE


无锡市好达电子有限公司
Shoulder Electronics Limited

更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

1. Package Dimension

Unit:mm

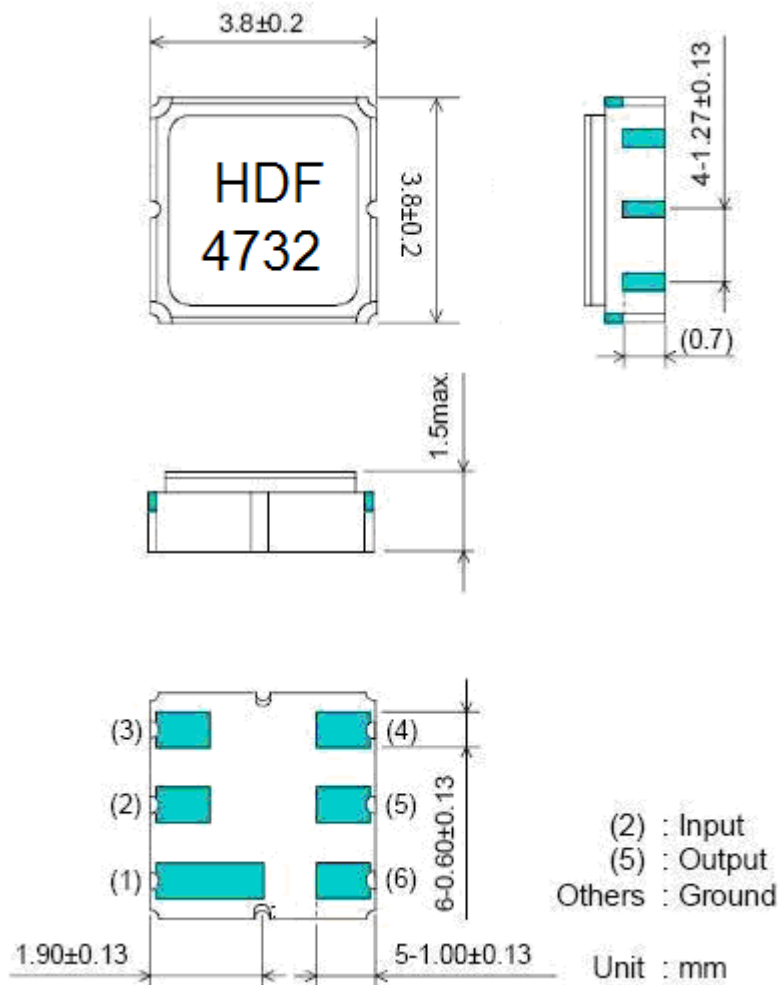

2. Marking: HDF4732

HD: Brand

F : Filter

4 : SMD-4

732: No.

3. Performance

3.1 Application

Low-Loss SAW Filter of cordless system.

Center Frequency: 770 MHz


3.2 Maximum Rating

Operation Temperature Range	-40℃ to +85℃
Storage Temperature Range	-40℃ to +85℃
DC. Permissive Voltage	0 V
Maximum Input Power	11dBm

3.3 Electronic Characteristics


	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	770	-
Insertion Loss (In Fc +/- 4 MHz)	dB		2.0	3.5
Amplitude Ripple (In Fc +/- 4 MHz)	dB		1.0	2.0
Relative Attenuation 0.3 MHz ~ Fo-35 MHz Fo+45 MHz ~	dB	40 40	50 50	-
Input/Output Impedance	Ohms		50	

3.4 Frequency Characteristics

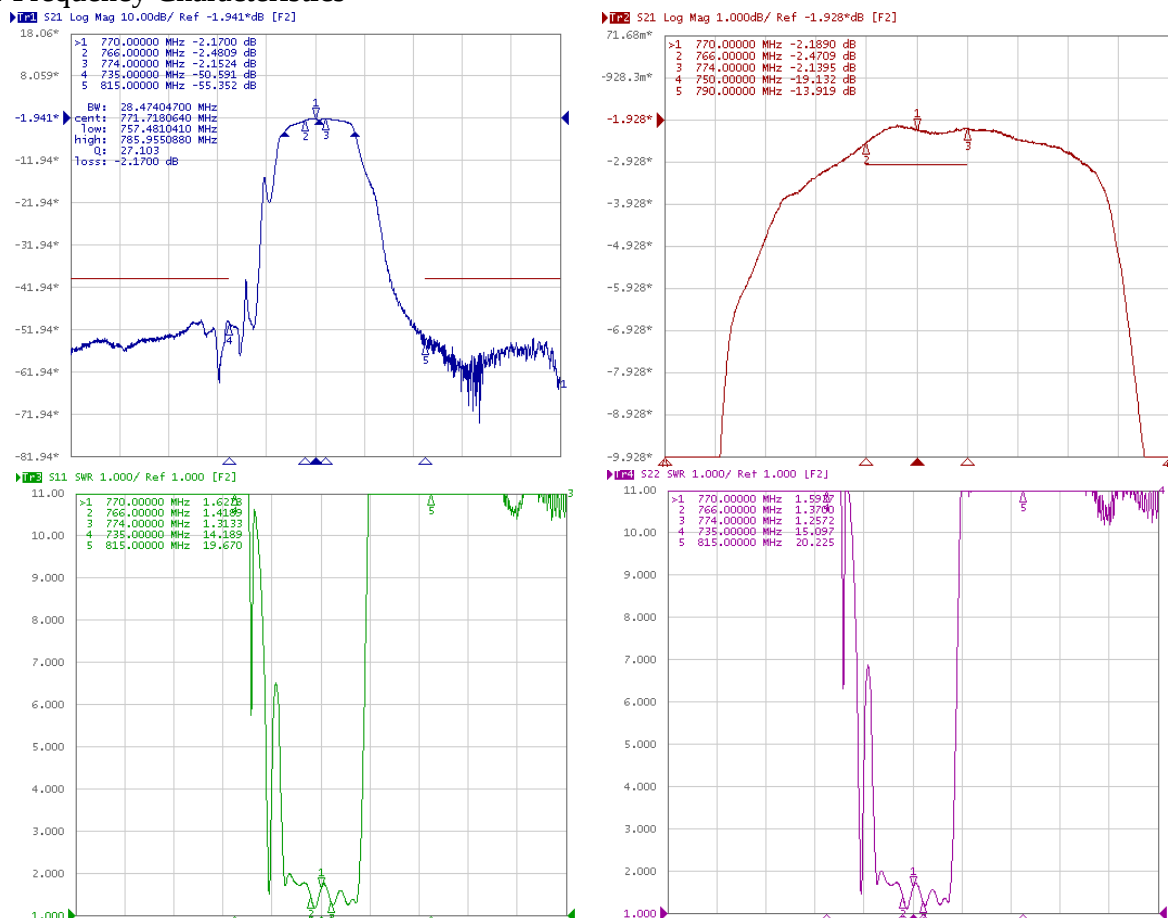


▶[F8] S11 Smith (R+jX) Scale 1.000U [F2]

>1	770.00000 MHz	40.927	0	-20.378	0	10.143	pF
2	766.00000 MHz	35.954	0	-4.7192	0	44.027	pF
3	774.00000 MHz	40.057	0	-7.0027	0	29.364	pF
4	735.00000 MHz	3.8844	0	4.5309	0	981.11	pH
5	815.00000 MHz	2.0211	0	-23.378	0	8.3532	pF

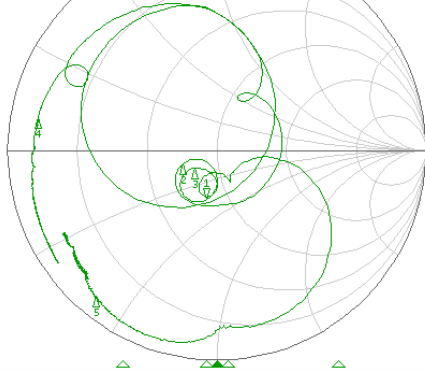


▶[F9] S22 Smith (R+jX) Scale 1.000U [F2]

>1	770.00000 MHz	42.303	0	-20.182	0	10.242	pF
2	766.00000 MHz	36.648	0	-2.3668	0	87.788	pF
3	774.00000 MHz	40.984	0	-5.1820	0	39.681	pF
4	735.00000 MHz	3.8152	0	4.1259	0	893.42	pH
5	815.00000 MHz	2.0512	0	-24.289	0	8.0400	pF

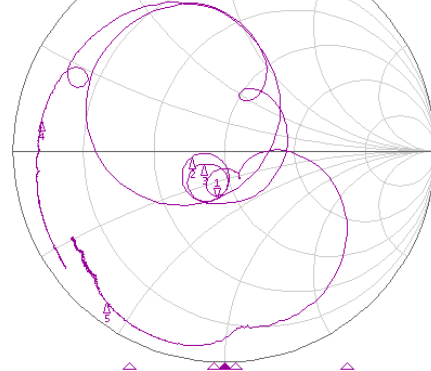

3.5 Test Circuit

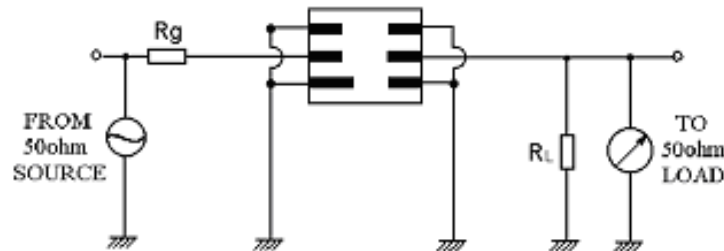

4. ENVIRONMENTAL CHARACTERISTICS

4-1 Temperature cycling

Subject the device to a low temperature of -45°C for 30 minutes. Following by a high temperature of $+25^{\circ}\text{C}$ for 5 Minutes and a higher temperature of $+85^{\circ}\text{C}$ for 30 Minutes. Then release the device into the room conditions for 1 to 2 hours prior to the measurement. It shall meet the specifications in 3.3.

4-2 Resistance to solder heat

Submerge the device terminals into the solder bath at $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 10 ± 1 sec. Then release the device into the room conditions for 4 hours. It shall meet the specifications in 3.3.

4-3 Solderability

Submerge the device terminals into the solder bath at $245^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 5s, More than 95% area of the soldering pad must be covered with new solder. It shall meet the specifications in 3.3.

4-4 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1 m 3 times. the filter shall fulfill the specifications in 3.3.

4-5 Vibration

Subject the device to the vibration for 2 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 hz. The filter shall fulfill the specifications in 3.3.

5. REMARK

5.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

5.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

5.3 Soldering

Only leads of component may be soldered. Please avoid soldering another part of component.

6. Packing

6.1 Dimensions

(1) Carrier Tape: Figure 1

(2) Reel: Figure 2

(3) The product shall be packed properly not to be damaged during transportation and storage.


6.2 Reeling Quantity

1000 pcs/reel 7"

3000 pcs/reel 13"

6.3 Taping Structure

(1) The tape shall be wound around the reel in the direction shown below.

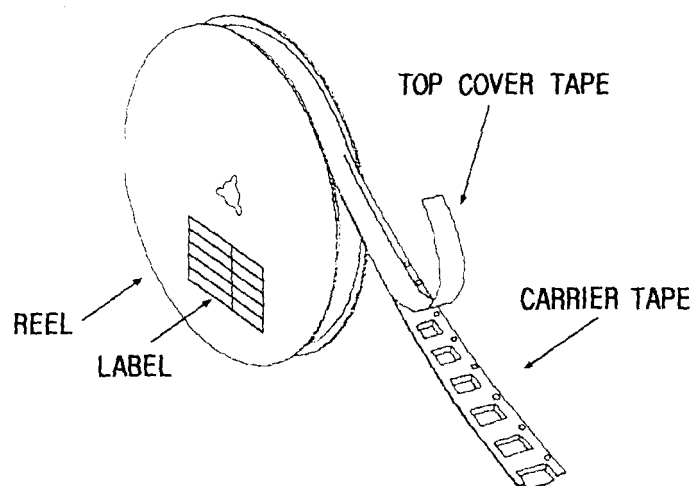


(2) Label

Device Name	
-------------	--

User Product Name	
Quantity	
Lot No.	

(3) Leader part and vacant position specifications.

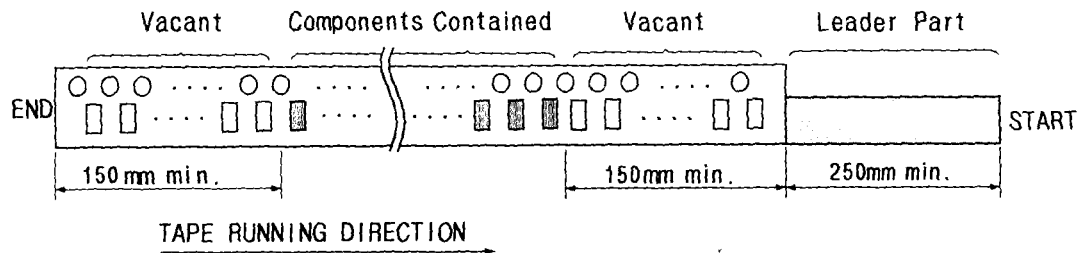


7. TAPE SPECIFICATIONS


7.1 Tensile Strength of Carrier Tape: 4.4N/mm width

7.2 Top Cover Tape Adhesion (See the below figure)

- (1) pull off angle: 0~15°
- (2) speed: 300mm/min.
- (3) force: 20~70g

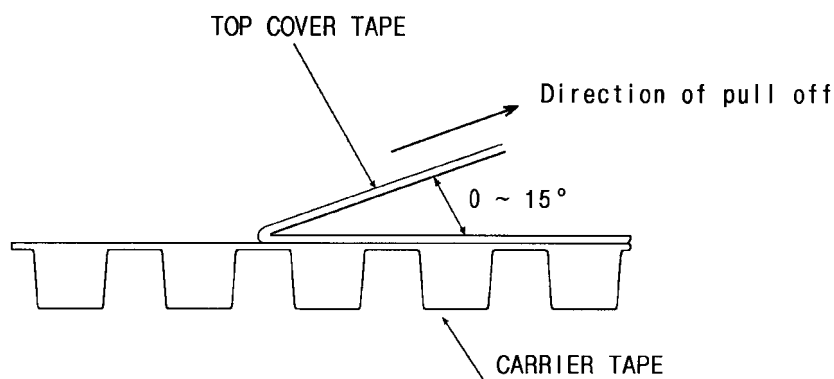

[Figure 1] Carrier Tape Dimensions

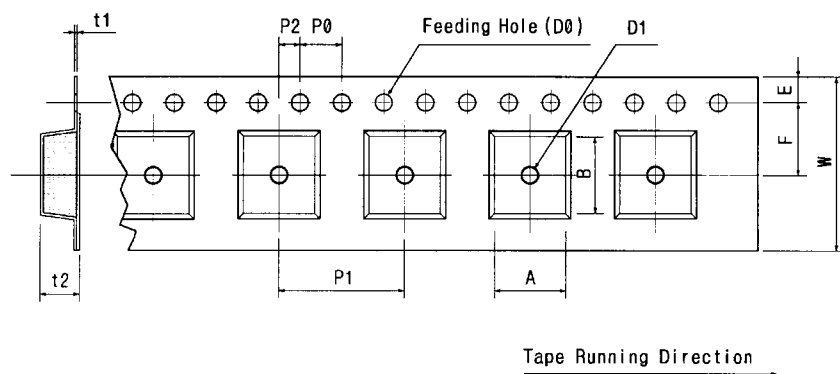


[Unit:mm]

W	F	E	P0	P1	P2	D0	D1	t1	t2	A	B
12.00	5.50	1.75	4.00	8.00	2.00	Ø1.50	Ø1.0	0.25	1.65	4.04	4.10
±0.30	±0.10	±0.10	±0.10	±0.10	±0.10		±0.25	±0.05	±0.10	±0.10	±0.10

[Figure 2]

[Unit:mm]

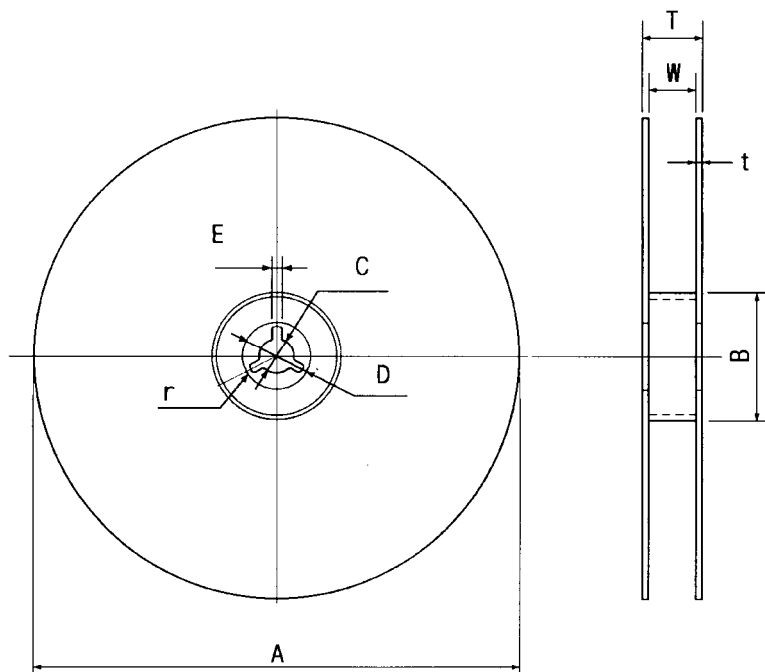

A	B	C	D	E	W	t	r
Ø330	Ø100	Ø13	Ø21	2	13	3	1.0
±1.0	±0.5	±0.5	±0.8	±0.5	±0.3	max.	max.