
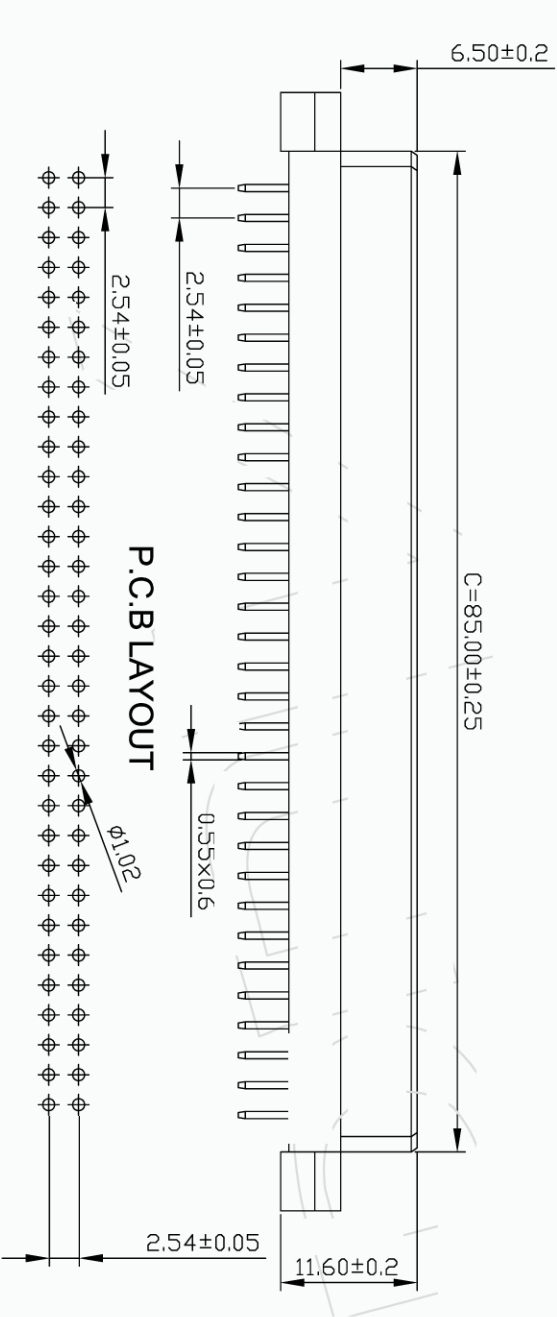


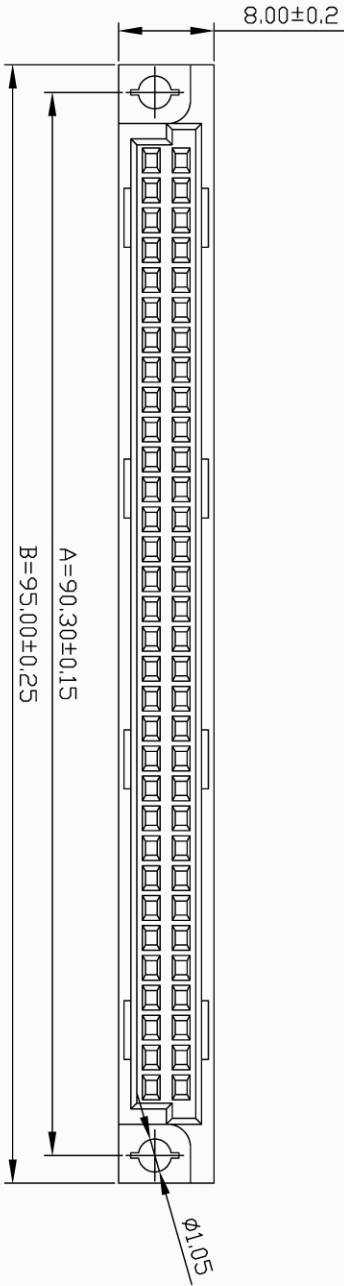

SPECIFICATIONS:
Current Rating: 3.0 AMP
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min.at DC=500V
Withstand Voltage: 1000V AC for one minute
Operation Temperature: -40° C to +105° C

MATERIALS:
Contact Material: Phosphor Bronze
Flammability Rating: UL 94V-0
Insulator Material: 30% Glass Filled PBT

Ordering Code

①	②	③	④	⑤	⑥	⑦	⑧
416	X	XX	X	X	X	X	X

- ① Series No. :
416=DIN 41612

② Contact Number of Row
2=Double row
3=Three row

③ Number of Contacts:
96 Pin, 64 Pin
48 Pin, 32 Pin

④ Contact Type:
M=Male
F=Female

⑤ Tial Style:
S=Straight DIP Type
R=Right Angle DIP Type

⑥ Pith:
1=2.54 mm
2=5.08 mm

⑦ Contact Plated
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6=Gold 30u"

⑧ Solder Length:
0=3.00 mm
1=4.00 mm
2=2.50 mm
3=13.0 mm
4=17.0 mm

E		Units	mm	Scale	4:1	Drawing By	Date	
D		Tolerance Unless Otherwise Specified		Reviewed By		Date		Date
C								
B				.X	~	±0.30		
A	RELEASED			.XX	~	±0.25		
REV	ECN.NO.			.XXX	~	±0.20	Approval By	Date
				Angle	~	± 3°	Thirt Angle Projection	
							F/Name	REV
								A