

Amphenol®



ePower-Lite

The ePower-Lite is a plastic power connector series designed to be used in the hybrid electric vehicle market. The series offers 2-pole, 3-pole and 4-pole options. The robust plastic shell can withstand high temperatures up to 125°C and provides dielectric protection for the connector.

With patented RADSOK® technology, the connector features higher amperage, lower T-rise and voltage drop, and less resistance.

The compact, plastic shell structure is light weight with a small footprint, and is field installable and repairable. ePower-Lite also includes a CPA to provide connector position assurance that it is mated. All these attributes make ePower-Lite the interconnect of choice for the EV and Hybrid markets.


Features and Benefits:

- Plastic shell, light weight
- Compact design for space considerations with EVs
- Low mating/un-mating force
- Durability: 100 mating cycles minimum
- Water Proof: IP67 & IP69K (mated)
- Touch-Proof: IEC 60529
- Flammability: UL 94V-0
- EMC optional
- HVIL optional
- RoHS Compliant


EV/HEV Application

Technical Data					
Contact Test Current	2-Pole	Option 1: 70A RADSOK®/5A HVIL	3.6mm RADSOK®	Test Voltage (Sea Level)	3000 VAC RMS
		Option 2: 120A RADSOK®/5A HVIL	5.7mm RADSOK®		
	3-Pole	70A RADSOK®/5A HVIL		Operating Temperature	-40°C to 125°C
	4-Pole	70A RADSOK®/13A HVIL		Operating Voltage	800V AC
Number of Contacts	2-Pole	2 & 2		Finger Proof	IEC 60529
	3-Pole	3 & 2		Durability	100 (Min)
	4-Pole	4 & 2		Water Proof	IP67 & IP69K (mated)
Contact Size	2-Pole	Option 1: 3.6mm/#20 Option 2: 5.7mm/#20		Salt Spray	96H
	3-Pole	3.6mm/#20		HVIL	Yes
	4-Pole	3.6mm/#20		EMI	Yes


3-Pole Electrical Receptacle
with HVIL & Shielding Shell

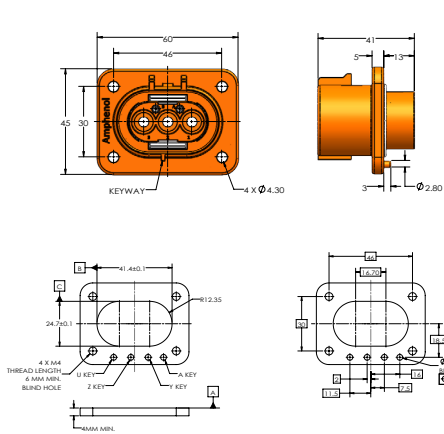


4-Pole Electrical Receptacle
with HVIL & Shielding Shell

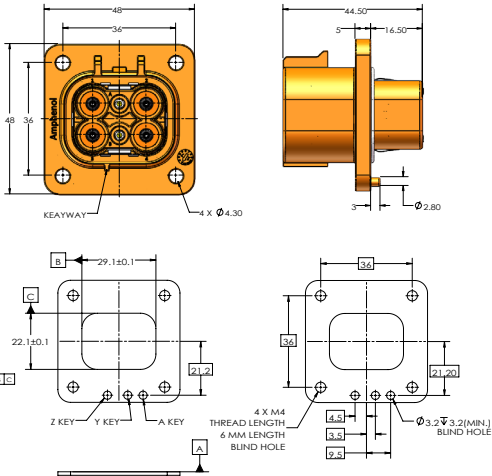


2-Pole Electrical Receptacle
with HVIL & Shielding Shell

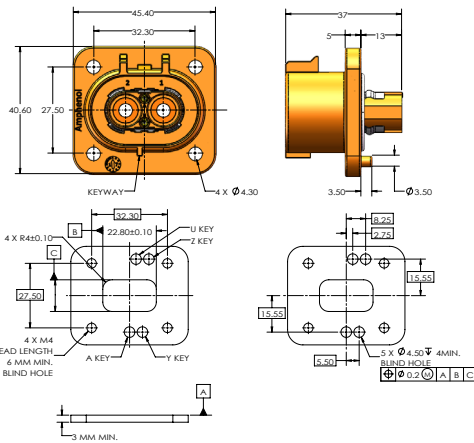


2-Pole 5.7mm Electrical Receptacle
with HVIL & Shielding Shell

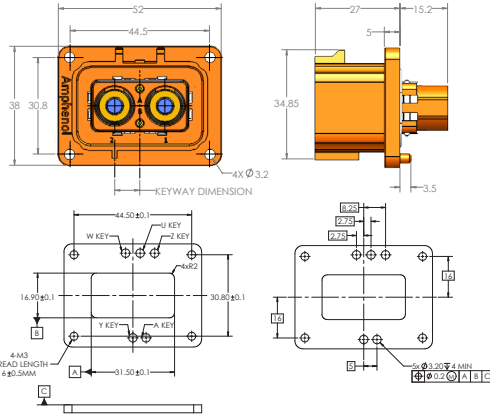


2-Pole Electrical Plug
with HVIL & Shielding Shell

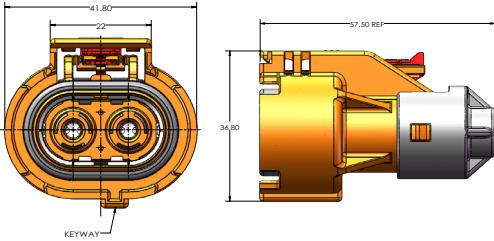


3-Pole Electrical Plug
with HVIL & Shielding Shell

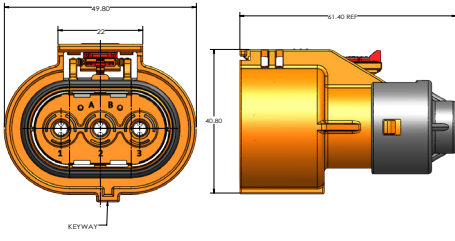

4-Pole Electrical Plug
with HVIL & Shielding Shell

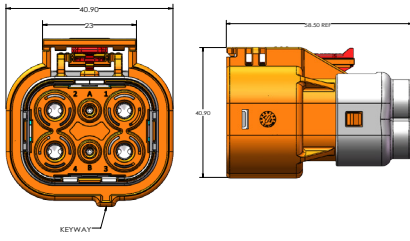

2-Pole 5.7mm Electrical Plug
with HVIL & Shielding Shell

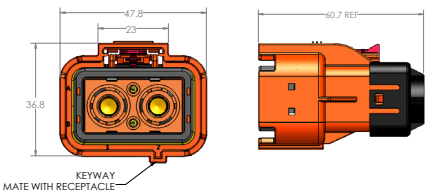

How To Order

Product Series	Connector Type	Pole Number	Index / Key	Crimped Wire Size	EMI & HVIL Options (Omit to include EMI & HVIL)
EL	P Plug	2 2-Pole	A Key/A	1 2.5mm²	N/A EMI & HVIL
	R Receptacle	3 3-Pole	Y Key/Y	2 4.0mm²	01 Yes EMI but No HVIL
		4 4-Pole	Z Key/Z	3 6.0mm²	10 No EMI but Yes HVIL
			U Key/U	4 10.0mm²	11 No EMI & No HVIL
				16 16.0mm²	2-Pole 5.7mm Only
				25 25.0mm²	2-Pole 5.7mm Only

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

For further information on your individual application requirements, contact: Amphenol Corporation

North America:
Amphenol Industrial Operations
180 N. Freepoint Drive, Plant 4
Nogales, AZ 85621
Tel: (888) 364-9011
Fax: (520) 285-5134
Email: tech@amphenol-aio.com

Europe:
Amphenol Industrial Operations Europe
Via Barbaiana 5
1-20020 Lainate (MI) Italy
Tel: +39 02 93254.204
Fax: +39 02 93254.444
Email: info@amphenol-aio.com

Middle East:
Amphenol Middle East Enterprises FZE
Office C-37 PO Box 21107
Ajman Free Zone, UAE
Tel: +9 716-7422494
Fax: +9 716-7422941
Email: jhussain@amphenol-industrial.com

Asia:
Amphenol Technology (Zhuhai) Co., Ltd.
No. 63 Xing Han Road, San Zao Town
Jin Wan District, Zhuhai City, China 519040
Tel: +86 756-3989760
Fax: +86 756-3989768
Email: enquiry@amphenol-aio.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[C10-738025-2AP4](#) [C10-737485-3AP3](#) [C10-737488-4AS2](#) [C10-738026-2AS1](#) [C10-737487-4AP1](#) [C10-737485-3AP2](#)
[C10-738026-2AS3](#) [C10-737487-4AP4](#) [C10-737488-4AS3](#) [C10-738025-2AP2](#) [C10-738025-2AP1](#) [C10-737487-4AP3](#)
[C10-737488-4AS4](#) [C10-738025-2AP3](#) [C10-737487-4AP2](#) [C10-737486-3AS3](#) [C10-737486-3AS1](#) [C10-737486-3AS2](#)
[C10-738026-2AS2](#) [C10-737486-3AS4](#) [C10-737485-3AP4](#) [C10-737488-4AS1](#) [C10-737485-3AP1](#) [C10-738026-2AS4](#)
[ELP02A02](#) [ELR03A02](#) [ELP02A01](#) [ELR04A03](#) [ELR02A02](#) [ELR02A01](#) [ELP03A02](#) [ELP02A03](#) [ELR02A03](#)
[ELP04A04](#) [ELP04A02](#) [ELP04A01](#) [ELR04A02](#) [ELR03A04](#) [ELR03A03](#) [ELP03A03](#) [ELR04A01](#) [ELP03A04](#)
[ELR04A04](#) [ELP03A01](#) [ELP04A03](#) [ELP02A04](#) [ELR03A01](#) [ELR02A04](#) [ELR3Y02](#) [ELR3Y03](#) [ELR3Z02](#) [ELR2Y02](#)
[ELR2Y03](#) [ELR2Z02](#) [ELR2Z03](#) [ELR3A02](#) [ELR3A03](#) [ELP4A03](#) [ELP4A04](#) [ELP4Y02](#) [ELP4Y03](#) [ELR2A02](#) [ELR2A03](#)
[ELR3Z03](#) [ELR4A03](#) [ELR4A04](#) [ELR4Y02](#) [ELR4Y03](#) [ELP3Z03](#) [ELP2Y03](#) [ELP2Z02](#) [ELP2Z03](#) [ELP3Y02](#) [ELP3Y03](#)
[ELP3Z02](#) [ELP2A02](#) [ELP2A03](#) [ELP2Y02](#) [ELR2Y04](#)