

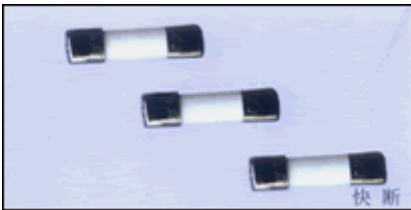


Fast-acting





Fast-acting




BLOWING	Load	Blowing Time
CHAR-ACTERISTIC	210%	< 30min
TEST	400%	10ms-300ms

BLOWING CHAR-ACTERISTIC TEST	Load	Blowing Time
	210%	< 30min
	400%	10ms-300ms


TUBE FUSE		SPECIFICATION	
3X10	5X20	6X30	6X25
100mA	40mA	40mA	40mA
125mA	50mA	50mA	50mA
160mA	63mA	63mA	63mA
200mA	80mA	80mA	80mA
250mA	100mA	100mA	100mA
315mA	125mA	125mA	125mA
400mA	160mA	160mA	160mA
500mA	200mA	200mA	200mA
630mA	250mA	250mA	250mA
800mA	315mA	315mA	315mA
1A	400mA	400mA	400mA
1.5A	500mA	500mA	500mA
2A	630mA	600mA	600mA
2.5A	800mA	630mA	630mA
3A	1A	750mA	750mA
3.15A	1.5A	800mA	800mA
4A	2A	1A	1A
6.3A	2.5A	1.5A	1.5A
	3.15A	2A	2A
	4A	2.5A	2.5A
	5A	3A	3A
	6.3A	4A	4A
	7A	5A	5A
	8A	6.3A	6.3A
	10A	7A	7A
	15A	8A	8A
		10A	10A
		15A	15A
		20A	20A
		25A	25A
		30A	30A

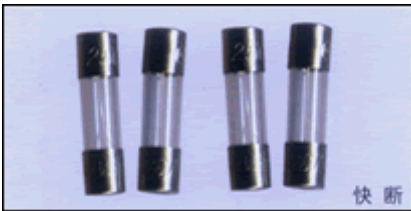

BLOWING CHAR-ACTERISTIC TEST	Load	Blowing Time
	210%	< 30min
	400%	10ms-300ms

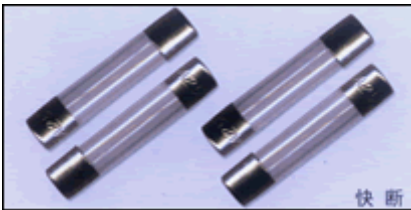

Fast-acting



BLOWING CHAR-ACTERISTIC TEST	Load	Blowing Time
	210%	< 30min
	400%	10ms-300ms

BLOWING CHAR-ACTERISTIC TEST	Load	Blowing Time
	150%	min. 1hr
	210%	max 30min
	275%	min 50ms max 2s
	400%	min 10ms max 300ms
	1000%	max 20s