

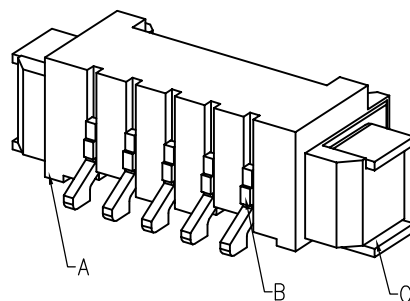
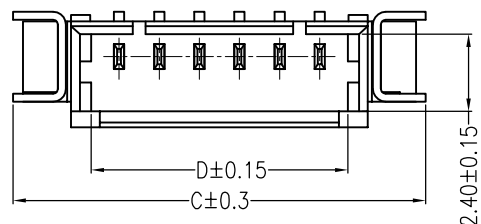





客户料号:

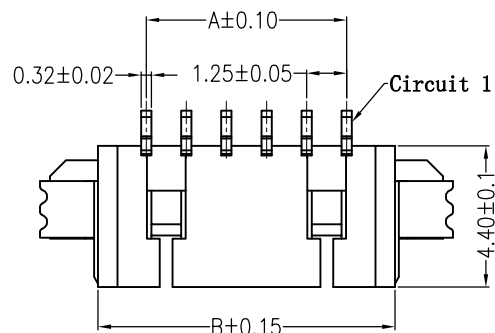

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$
额定电压 (Rated voltage): 125 V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

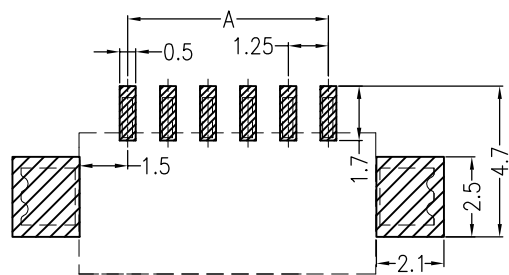

SUGGESTED PCB LAYOUT

Circuit	Dimensions (mm)				Circuit	Dimensions (mm)			
	A	B	C	D		A	B	C	D
02	1.25	4.25	7.75	3.05	10	11.25	14.25	17.75	13.05
03	2.50	5.50	9.00	4.30	11	12.50	15.50	19.00	14.30
04	3.75	6.75	10.25	5.55	12	13.75	16.75	20.25	15.55
05	5.00	8.00	11.50	6.80	13	15.00	18.00	21.50	16.80
06	6.25	9.25	12.75	8.05	14	16.25	19.25	22.75	18.05
07	7.50	10.50	14.00	9.30	15	17.50	20.50	24.00	19.30
08	8.75	11.75	15.25	10.55	16	18.75	21.75	25.25	20.55
09	10.00	13.00	16.50	11.80					

NINGBO KLS ELECTRONIC CO., LTD

APPROVED BY

UNIT TOLERANCE LTP.

REVISION RECORD

NAME

DATE

NO.

DESCRIPTION


QTY

MATERIAL

PLATING/COLOR

L-KLS1-XL1-1.25-03-RM-R

MODEL NAME:1.25mmPITCH 90° WAFER SMT TYPE



DATE

REVISION

ANGLE

2013.03.06

A/1

X°

±3.0°

L-KLS1-XL1-1.25-03-RM-R