
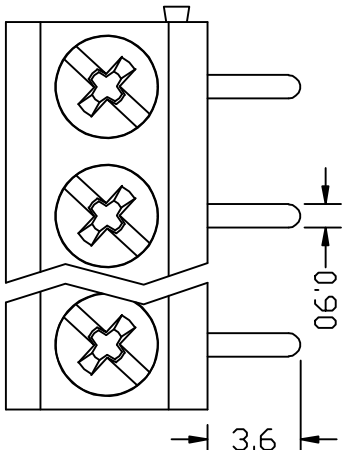


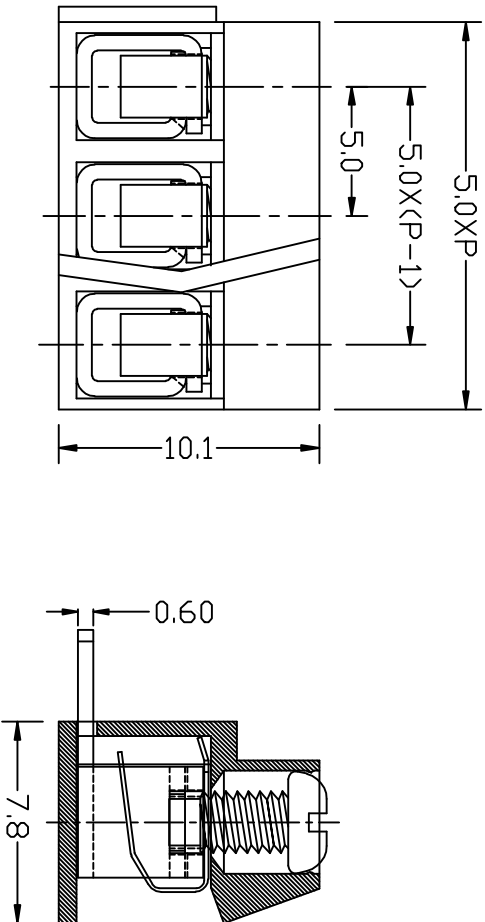

300V 10A 26-14AWG 2.5mm²
Poles: 2P&3P-24P
Pitch: 5.0mm (.197")

Materials
Housing: PA66 (UL 94V-0)
Wire Protector: Stainless Steel
Solder Pin: Brass, Tin Plated
Screw: M2.5, Steel (A3), Zinc Plated
Torque: 0.4N.m

设计/Designed by		绘图/Drawing by		审核/Checked by		批准/Approved by		备注/Remarks	
图名/Title		文件编号/File No.							
XY126R-5.0									
页序/Sheet									