
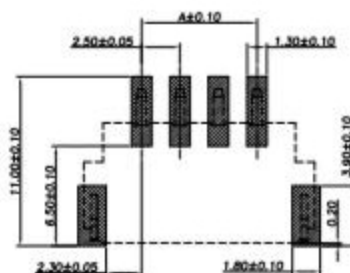


RoHS Compliant

REV.	EDN. NO.	DESCRIPTION	APPRO.
		NEW RELEASE	





PCB LAYOUT

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

PART No. A2501AWR-**-F2MA-R		PACKAGING: R=Reel
No. OF CIRCUITS: 02~18	PLASTIC MATERIAL: F2M=LCP(Nature)	PLATING: A=Tin-Plated



Circuits	Dimensions		
	A	B	C
02	2.50	6.00	10.00
03	5.00	8.50	12.50
04	7.50	11.00	15.00
05	10.00	13.50	17.50
06	12.50	16.00	20.00
07	15.00	18.50	22.50
08	17.50	21.00	25.00
09	20.00	23.50	27.50
10	22.50	26.00	30.00
11	25.00	28.50	32.50
12	27.50	31.00	35.00
13	30.00	33.50	37.50
14	32.50	36.00	40.00
15	35.00	38.50	42.50
16	37.50	41.00	45.00
17	40.00	43.50	47.50
18	42.50	46.00	50.00

3	Solder Tab	2	Phosphor Bronze	Tin-Plated
2	Contacts	2~18	Phosphor Bronze	Tin-Plated
1	Insulator	1	LCP(UL94V-0)	Nature
No.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance I.X ± 0.30 I.XX ± 0.30 I.XXX ± 0.10 Angle $\pm 0.0^{\circ}$	Model Name: 2.50mm PITCH 90° RAFTER-SMT TYPE Model No: A2501AWR-**-F2MA-R	Drum: 标准是 2000000
UNIT: mm	SCALE: FULL	Checked: 标准
	REVISION: B/0	Approved: 标准