



300V 8A
Poles: 2P-24P
Pitch: 3.5mm(.138")/3.81mm(.150")

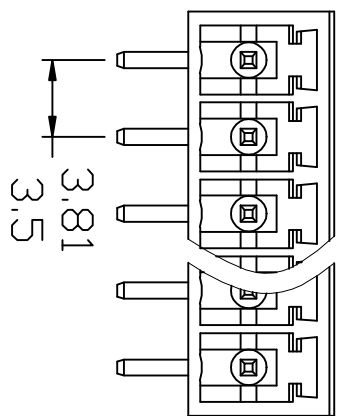

Materials
Housing: PA66(UL 94V-0)
Solder Pin: Brass, Tin Plated.

设计/Designed by		绘图/Drawn by		审核/Checked by		批准/Approved by		备注/Remarks	
<div></div> <div>新莱亚电子</div> <div>XINLAIYA ELECTRONIC CO., LTD</div>		图名/Title		文件编号/Part No.		页序/Sheet		单位/units	
		XT7500R-G		XT7500R-F					