


**Series Impedance  
Film capacitors**

**PCX2 347**

**MKT RADIAL POTTED CAPACITORS**

**Pitch 10.0/15.0/22.5/27.5mm**

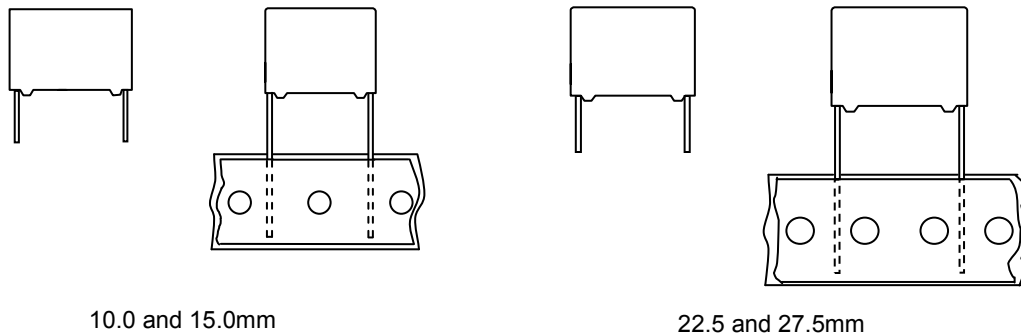


**QUICK REFERENCE DATA**


Capacitance range (E6 series) * Capacitance tolerance Rated (AC) voltage 50 to 60 Hz Climatic category Temperature range Reference IEC, UL specification Safety approvals  Potting & Encapsulation material Safety class	0.01 $\mu$ F to 2.2 $\mu$ F $\pm$ 10 %, $\pm$ 20 % 310 V~ 55/110/56 -55 $^{\circ}$ C ~ +110 $^{\circ}$ C IEC 60384-14(3rd edition) and UL60384-14 ENEC, EK UL60384-14 Qualified in accordance with UL 94V-0 X2
---	---

\* Intermediate values of the E12 series are available to special order

<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>. 10.0 to 27.5 mm lead pitch</li> <li>. Supplied loose in box and taped on reel</li> <li>. Consist of a low-inductive wound cell of Metallized Polyester film, potted in a flame retardant case</li> </ul>	<p><b>APPLICATIONS</b></p> <ul style="list-style-type: none"> <li>. For X2-electromagnetic interference suppression</li> <li>. Specially designed to meet the <b>NEW REQUIREMENTS</b> in new IEC 60384-14 specification(3rd edition)/UL 60384-14 requiring for X2 a 2.5kV peak pulse voltage test</li> <li>. Energy meter</li> <li>. Stable capacitance in damp environment 85<math>^{\circ}</math>C85%RH, 240Vac, 1000hours</li> </ul>
--	---

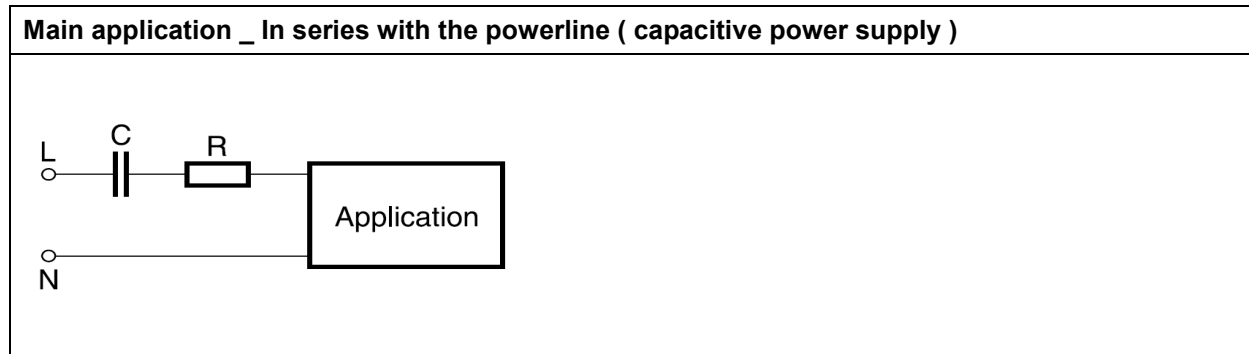

**Ordering Information**

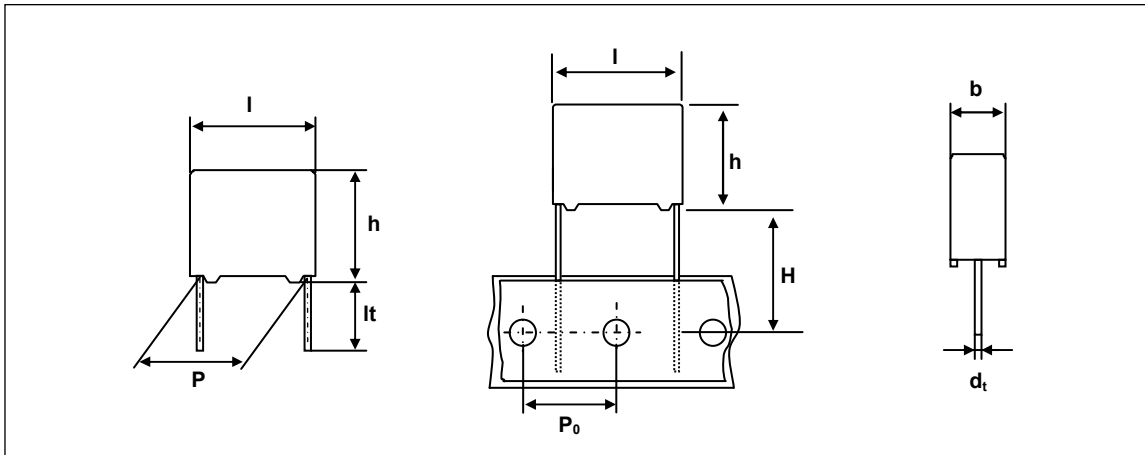

PCX2 347 X X X XXX

Capacitance

Code	Voltage
3	310V

Code	Original Pitch
D	10.0 mm
F	15.0 mm
J	22.5 mm
L	27.5 mm

Available versions					Product ( $l_{max}$ )			
code	Packing method	C - tol.	Lead length & Height	Hole to hole ( $P_0$ )	12.5	18.0	26.0	31.0
					Pitch (P)			
0	Loose in box	$\pm 20\%$	$lt = 5.0 \pm 1.0mm$	-	10.0	15.0	22.5	27.5
1	Loose in box	$\pm 10\%$	$lt = 5.0 \pm 1.0mm$	-	10.0	15.0	22.5	27.5
4	Loose in box	$\pm 20\%$	$lt = 25.0 \pm 2.0mm$	-	10.0	15.0	22.5	27.5
5	Loose in box	$\pm 10\%$	$lt = 25.0 \pm 2.0mm$	-	10.0	15.0	22.5	27.5
6	Ammopack	$\pm 20\%$	$H = 18.5mm^*$	12.7mm	10.0	15.0	22.5	27.5
7	Ammopack	$\pm 10\%$	$H = 18.5mm^*$	12.7mm	10.0	15.0	22.5	27.5

\* H ; intape height ; for detailed specifications refer to chapter PACKAGING

\*\* Some values is not following the coding rule.

## Series Impedance Film capacitors

PCX2 347

### SAFETY APPROVALS

SAFETY APPROVALS	Voltage	Value	File Number
UL60384-14	310V(AC)	0.01 $\mu$ F to 2.2 $\mu$ F	E165646
ENEC(SEMKO) *	310V(AC)	0.01 $\mu$ F to 2.2 $\mu$ F	SE/0256-7
EK	310V(AC)	C $\leq$ 0.1 $\mu$ F 0.1 $\mu$ F < C $\leq$ 0.33 $\mu$ F 0.33 $\mu$ F < C $\leq$ 1.0 $\mu$ F	SH03001-14001 SH03001-14002 SH03001-14003

\* The ENEC-approval together with the CB-Certificate replace all national approval marks of the following countries(they have already signed the ENEC-Agreement): Austria; Belgium; Czech. Republic; Denmark; Finland; France; Germany; Greece; Hungary; Ireland; Italy; Luxembourg; Netherlands; Norway; Portugal; Slovenian; Spain; Sweden; Switzerland and United Kingdom

### Packaging Information

SMALLEST PACKING QUANTITIES (SPQ)	LOOSE IN BOX	
	It = 5.0 $\pm$ 1.0 mm	It = 25 $\pm$ 2.0 mm
<b>DIMENSIONS</b>		
4.0 x 10.0 x 12.5	2000	1000
5.0 x 11.0 x 12.5	1500	1000
6.0 x 12.0 x 12.5	1000	1000
6.0 x 12.0 x 18.0	1000	1000
7.0 x 13.5 x 18.0	1000	1000
8.5 x 13.5 x 18.0	1000	1000
8.5 x 15.0 x 18.0	1000	1000
10.0 x 16.5 x 18.0	1000	1000
11.0 x 18.5 x 18.0	1000	1000
7.0 x 16.5 x 26.0	1000	1000
8.5 x 18.0 x 26.0	500	500
10.0 x 19.5 x 26.0	500	500
12.0 x 22.0 x 26.0	500	500
16.5 x 22.0 x 26.0	250	250
9.0 x 19.0 x 31.0	500	500
10.0 x 20.0 x 31.0	500	250
11.0 x 21.0 x 31.0	500	250
13.0 x 23.0 x 31.0	250	250
21.0 x 31.0 x 31.0	150	150

## Series Impedance Film capacitors

PCX2 347

### SPECIFIC REFERENCE DATA FOR 310 V<sub>AC</sub>

Tangent of loss angle	at 1 khz	at 10 khz
C ≤ 1 μF	≤ 80 × 10 <sup>-4</sup>	≤ 150 × 10 <sup>-4</sup>
C > 1 μF	≤ 80 × 10 <sup>-4</sup>	-
Rated voltage pulse slope (dV/dt) <sub>R</sub>	100 V/μs	
R between leads, for C ≤ 0.33 μF	> 15 000 MΩ	
RC between leads, for C > 0.33 μF	> 5 000 s	
Withstanding(DC) Voltage (cut-off current 10mA)	4.3* V <sub>R</sub> , 1min	
Withstanding(AC) Voltage between leads and case	2400V 1min	

V<sub>Rac</sub> = 310V<sup>~</sup> X2

loose and taped

Cap. (μF)	b x h x l (mm)	MASS (g)	CATALOGUE NUMBER			
			PCX2 347.....			
			loose in box			
			lt = 5 ± 1.0 mm		lt = 25 ± 2.0 mm	
			C - tol. ±20 %	C - tol. ±10 %	C - tol. ±20 %	C - tol. ±10 %
Pitch = 10.0 ± 0.4 mm			dt = 0.6 +0.06/-0.05 mm			
0.01	4.0 x 10.0 x 12.5	0.8	D30103	D31103	D34103	D35103
0.015	4.0 x 10.0 x 12.5	0.8	D30153	D31153	D34153	D35153
0.022	4.0 x 10.0 x 12.5	0.8	D30223	D31223	D34223	D35223
0.033	5.0 x 11.0 x 12.5	0.9	D30333	D31333	D34333	D35333
0.047	5.0 x 11.0 x 12.5	0.9	D30473	D31473	D34473	D35473
0.068	6.0 x 12.0 x 12.5	1.0	D30683	D31683	D34683	D35683
0.082	6.0 x 12.0 x 12.5	1.0	D30823	D31823	D34823	D35823
0.1	6.0 x 12.0 x 12.5	1.0	D30104	D31104	D34104	D35104
Pitch = 15.0 ± 0.4 mm			dt = 0.8 +0.08/-0.05 mm			
0.1	6.0 x 12.0 x 18.0	1.4	F30104	F31104	F34104	F35104
0.15	7.0 x 13.5 x 18.0	1.9	F30154	F31154	F34154	F35154
0.22	8.5 x 15.0 x 18.0	2.6	F30224	F31224	F34224	F35224
0.33	10.0 x 16.5 x 18.0	3.1	F30334	F31334	F34334	F35334
0.47	11.0 x 18.5 x 18.0	4.1	F30474	F31474	F34474	F35474
Pitch = 22.5 ± 0.4 mm			dt = 0.8 +0.08/-0.05 mm			
0.33	7.0 x 16.5 x 26.0	3.2	J30334	J31334	J34334	J35334
0.47	8.5 x 18.0 x 26.0	4.4	J30474	J31474	J34474	J35474
0.68	10.0 x 19.5 x 26.0	5.5	J30684	J31684	J34684	J35684
1.0	12.0 x 22.0 x 26.0	9.0	J30105	J31105	J34105	J35105
1.5	16.5 x 22.0 x 26.0	10.0	J30155	J31155	J34155	J35155
Pitch = 27.5 ± 0.4 mm			dt = 0.8 +0.08/-0.05 mm			
0.47	9.0 x 19.0 x 31.0	5.5	L30474	L31474	L34474	L35474
0.68	10.0 x 20.0 x 31.0	6.5	L30684	L31684	L34684	L35684
1.0	11.0 x 21.0 x 31.0	7.8	L30105	L31105	L34105	L35105
1.5	13.0 x 23.0 x 31.0	10.4	L30155	L31155	L34155	L35155
2.2	21.0 x 31.0 x 31.0	20.5	L30225	L31225	L34225	L35225

## MOUNTING

### NORMAL USE

The capacitors are designed for mounting on printed-circuit boards.

The capacitors packed in bandoliers are designed for mounting on printed-circuit boards by means of automatic insertion machines.

For detailed specifications refer to chapter "PACKAGING".


### SPECIFIC METHOD OF MOUNTING TO WITHSTAND VIBRATION AND SHOCK

In order to withstand vibration and shock tests, it must be ensured that the stand-off pins are in good contact with the printed-circuit board.

- . For pitches of 15mm the capacitors shall be mechanically fixed by leads.
- . For larger pitches the capacitors shall be mounted in the same way and the body clamped.

## SPACE REQUIREMENTS ON PRINTED-CIRCUIT BOARD

The maximum length and width of film capacitors are shown in the following drawing ;

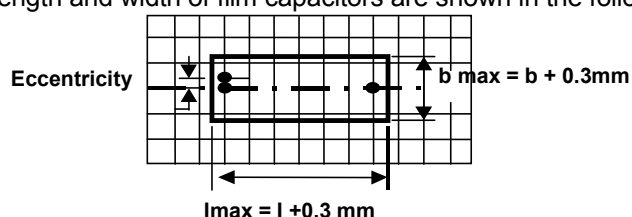

- Product height with seating plane as given by IEC 60717 as reference :  $h_{max} \leq h + 0.3 \text{ mm}$

## STORAGE TEMPERATURE


- . Storage temperature :  $T_{stg} = -25$  to  $+40$  °C with RH maximum 80% without condensation.

## RATINGS AND CHARACTERISTICS

Unless otherwise specified all electrical values apply to an ambient temperature of  $23 \pm 1$  °C, an atmospheric pressure of 86 to 106kPa and a relative humidity  $50 \pm 2\%$ .

For reference testing, a conditioning period shall be applied of  $96 \pm 4$  hours by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20%.

## Maximum RMS Voltage as a function of frequency

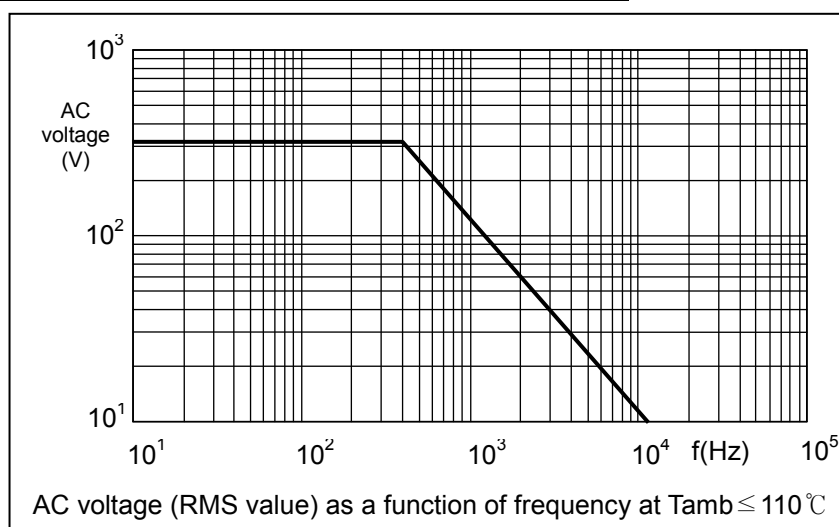

**PRODUCT MARKING**

Capacitors are marked with having following information;

- 1.Manufacturer (PILKOR)
- 2.Manufacturer's type designation (PCX2 347 )
- 3.Rated capacitance in code according to IEC 60062
- 4.Rated (AC) voltage (310V~)
- 5.Sub class (X2)
- 6.Tolerance on rated capacitance M =± 20 % K = ± 10 %
- 7.Climatic category (55/110/56)
- 8.Metallized polyester film (MKT)
- 9.Year and week of manufacturing (e.g 1401)
- 10.Safety approvals

**Example of marking**

Pitch P = 10.0mm




Marking on the side

or




Marking on the side


Pitch P = 15.0mm or P = 22.5 mm or P = 27.5mm



Marking on the top



Marking on the side

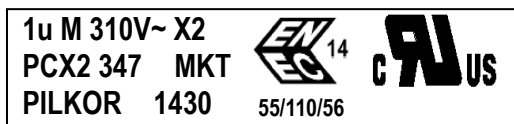

Marking on headface



Marking on headface