



FILE: D02\TL02\TLM\TLM002\TLM-002C-1414-02P



PCB LAYOUT

NOTES:

- 1.Rating:250V 2A(VDE/CE) 300V 8A(UL)
 - 2.Insulation Withstands Voltage:AC1500V/MIN(UL)
AC2000V/MIN(VDE/CE)
 - 3.Insulation Resistance: 500M Ω or more at DC500V
 4. Using Temperature Range:-40°C/+115°C(UL)
-5°C/+85°C(VDE)
 - 5.Suitable Electric Wire:Solid 14-28AWG,Strand 16-28AWG(UL)
0.5-0.75mm²(VDE)
 - 6.Insulation stripping length:8-9mm.
 - 7.RoHS Compliance.
 - 8."★" the important dimension
- Specific note: Confront the Push-Buttons, From left to right
black, red.

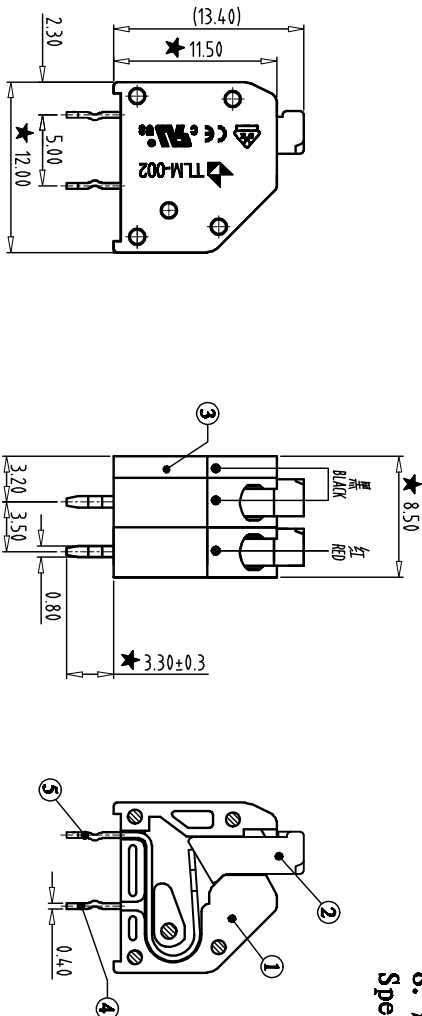

Total Pitch Tolerances										Nominal dimension range										—	≠	—	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	10	over	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10		100	to	to	150

6

5

4

3

2

1

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
5	LONG-PIN	TL021B0002	1	BRONZE	Tin Plated
4	SHORT -PIN	TL021B0001	1	BRONZE	Tin Plated
3	END COVER	TL021C4006	1	PA66(V0)	BLACK K02
2	LEVER	TL021C3005	1	PA66(V0)	RED R03
		TL021C3006	1	PA66(V0)	BLACK K02
1	HOUSING	TL021C2005	1	PA66(V0)	RED R03
		TL021C2006	1	PA66(V0)	BLACK K02
DWG.	Lihw	DATE	17.06.06	UNITS	MM
CHK		DATE		SCALE	2 : 1
APP.		DATE		NAME	
				DWGNO.	TL-02-TLM002C1414



TIANLI
ELECTRICAL MACHINERY(NINGBO)CO.,LTD.

TLM-002C-1414-02P