
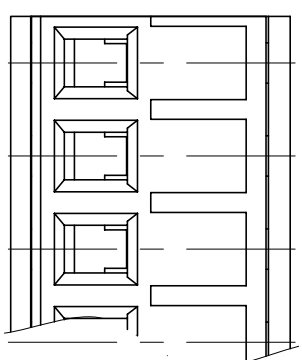


- NOTES:
1. Rating:300V 15A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40℃~+105℃
 5. Screw Torque Value:0.4N.m
 6. Suitable Electric Wire: 28~12AWG
 7. "★" is the important dimension.

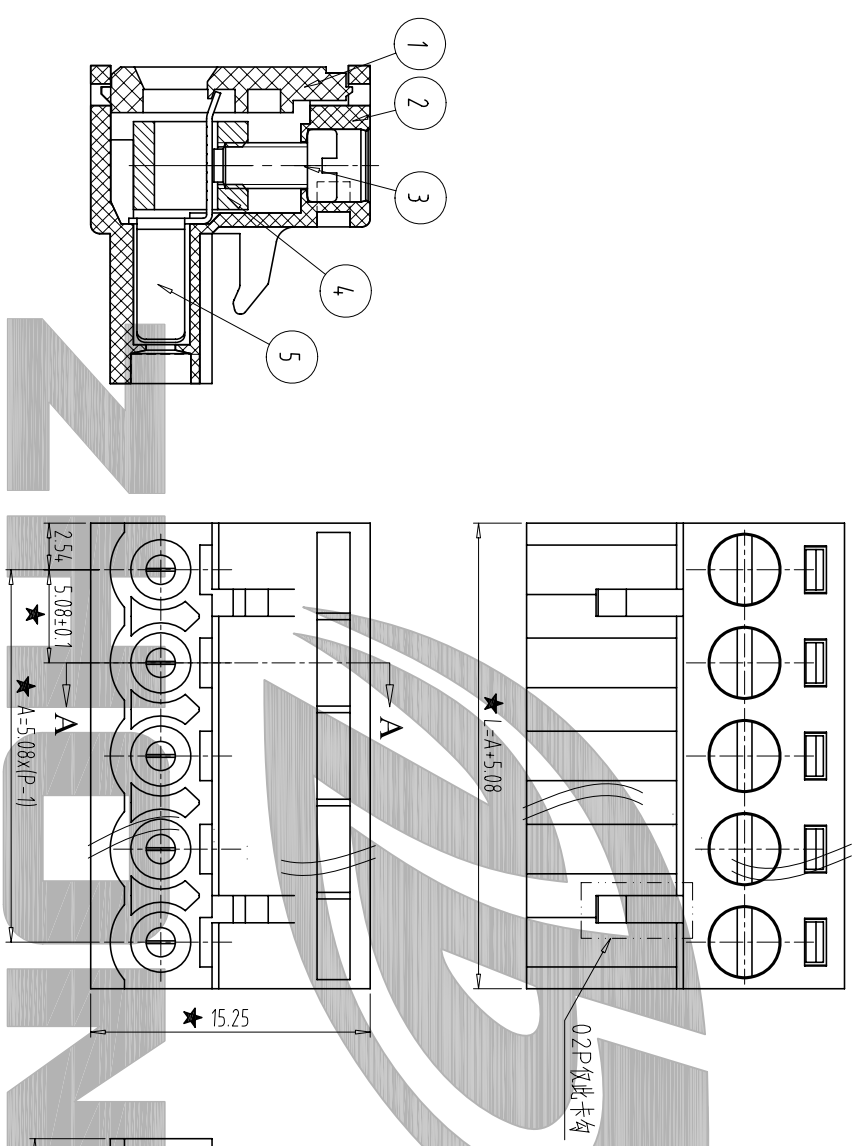

ZBK400R
2EDG-5.08

Total Pitch Tolerances		Nominal dimension range															—	//
in mm		in mm																
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2
																		0.3
																		0.3
																		0.2
																		0.3
																		0.5

5	CLAMP	ZK400C0001	P	BRONZE	Ni Plated
4	BLOCK	ZBXC0001	P	BRASS	Ni Plated
3	SCREW	ZBST0017	P	STEEL	M2.5/Zn Plated
2	HOUSING	ZK400A3XXXX	1	PA66	UL94V-0
1	COVER	ZK400A5XXXX	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/09/11	SIZE	A4
CHK	DATE			SCALE	2.5:1
APP.	DATE				2EDG-5.08

ZHONGBO

NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD	DWGNO.	ZB-02-ZBK400RXXPXS
---	--------	--------------------