

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	



NOTES:

1. MATERIAL


- 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT MATERIAL:COPPER ALLOY.

2. SPECIFICATION

- 2.1 CURRENT RATING:1.0 Amp.
- 2.2 INSULATION RESISTANCE:500MΩ Min.
- 2.3 DIELECTRIC WITHSTANDING:300VAC.
- 2.4 CONTACT RESISTANCE:20mΩ Max.
- 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

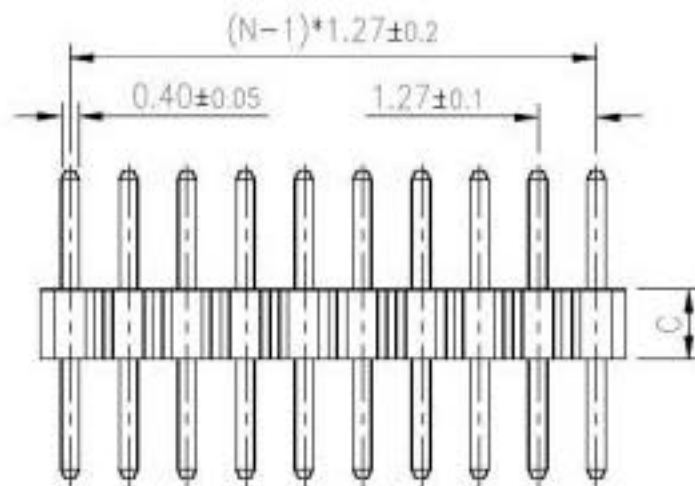

N:NUMBER OF CONTACTS

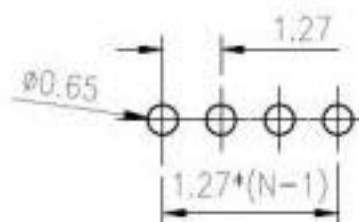

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

18		
19		
20		
21		
22		
23		
24		
25		

10		
11		
12		
13		
14		
15		
16		
17		

TYPE	DIM A	DIM B
1	2.60	2.60
2		
3		
4		
5		
6		
7		
8		
9		

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	1.27mm PITCH PIN HEADER SINGLE ROW STRAIGHT
X.	±0.60	X.	±5°	UNITS		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES LL1013-01A
.XX	±0.25	.XX	±2°			
DRAWING TYPE	CUSTOMER					
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.						