



	A	B
2	2.5	7.4
3	5.0	9.9
4	7.5	12.4
5	10.0	14.9
6	12.5	17.4
7	15.0	19.9
8	17.5	22.4
9	20.0	24.9
10	22.5	27.4
11	25.0	29.9
12	27.5	32.4
13	30.0	34.9
14	32.5	37.4
15	35.0	39.9


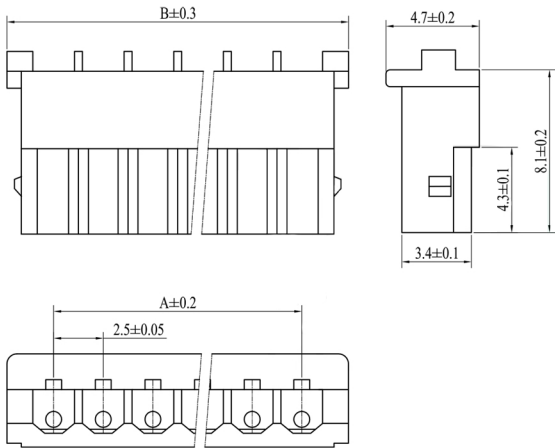


- (SPECIFICATIONS)

 - Voltage rating: 250V AC DC
 - Current rating: 2.0A AC DC MIN
 - Withstand voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ MIN
 - Contact resistance: 20mΩ MAX
 - Working Temperature: -25°C~ +85°C
 - Pitch: 2.5 mm
- (MATERIAL)

 - Housing: Nylon66

孔数	A	B
2	2.5	7.4
3	5.0	9.9
4	7.5	12.4
5	10.0	14.9
6	12.5	17.4
7	15.0	19.9
8	17.5	22.4
9	20.0	24.9
10	22.5	27.4
11	25.0	29.9
12	27.5	32.4
13	30.0	34.9
14	32.5	37.4
15	35.0	39.9


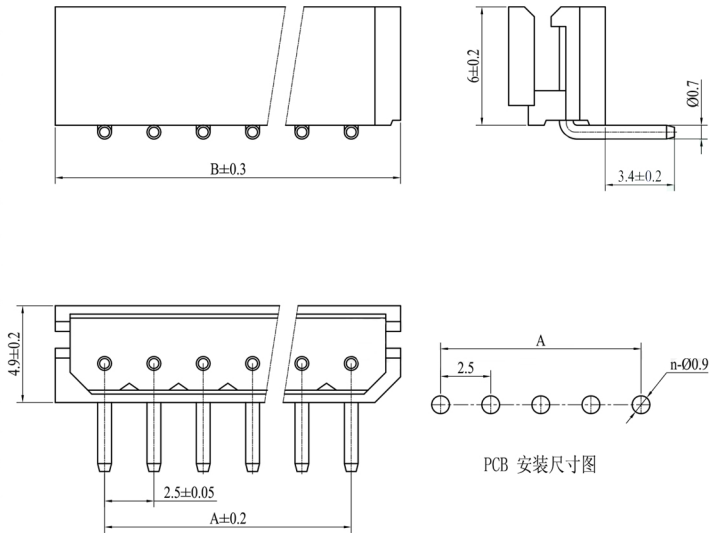


- (SPECIFICATIONS)

 - Voltage rating: 250V AC DC
 - Current rating: 2.0A AC DC MIN
 - Withstand voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ MIN
 - Contact resistance: 0.02Ω MAX
 - Working Temperature: -25°C~ +85°C
 - Pitch: 2.5 mm
- (MATERIAL)

 - Housing: PA66
 - Pin: Brass

孔数	A	B
2	2.5	7.4
3	5.0	9.9
4	7.5	12.4
5	10.0	14.9
6	12.5	17.4
7	15.0	19.9
8	17.5	22.4
9	20.0	24.9
10	22.5	27.4
11	25.0	29.9
12	27.5	32.4
13	30.0	34.9
14	32.5	37.4
15	35.0	39.9

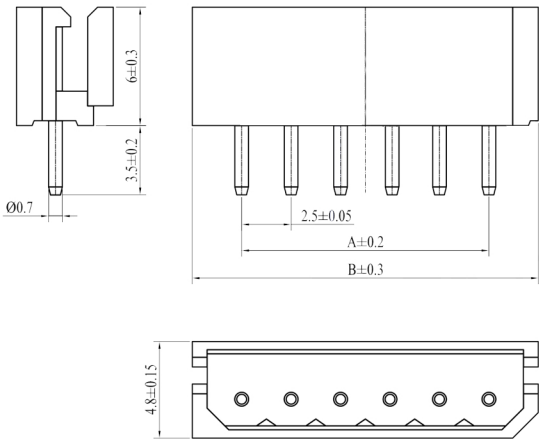

- (SPECIFICATIONS)

 - Voltage rating: 250V AC DC
 - Current rating: 2.0A AC DC MIN
 - Withstand voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ MIN
 - Contact resistance: 20mΩ MAX
 - Working Temperature: -25°C~ +85°C
 - Pitch: 2.5 mm
- (MATERIAL)

 - Housing: PA66
 - Pin: Brass