



Femle Terminal



Female Terminal

Wire Range		O.D of Wire
Section area mm ²	AWG#	mm
0.33~0.83	22~18	1.7~3.0


Femle Housing




Female Housing

Position	Dimension	
	A	B
2	3.96	7.86
3	7.92	11.82
4	11.88	15.78
5	15.84	19.74
6	19.80	23.70
7	23.76	27.66
8	27.72	31.62
9	31.68	35.58
10	35.64	39.54
11	39.60	43.50
12	43.56	47.46
13	47.52	51.48

V/T Type

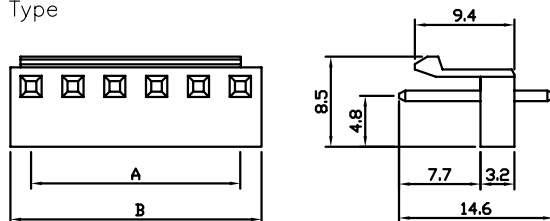

Right Angle

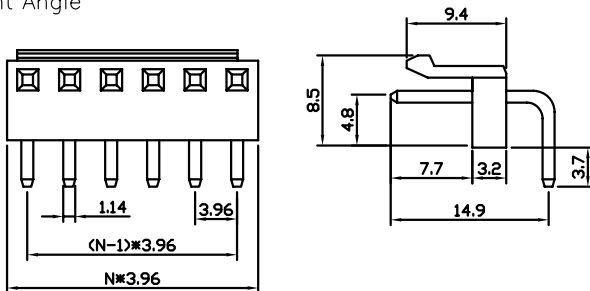

N=No. of contacts

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 29/06/05		

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Wire range: AWG#22~#18
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance: $\leq 30\text{m}\Omega$
- . Insulation resistance: $\geq 1000\text{M}\Omega$
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: $-25 \sim +85^{\circ}\text{C}$
- . Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

DS1073 - X X X X X

Contact Plating
6: Tin
8: Full gold flash

Housing Color
W: White

Mounting type
C: Crimp
R: Right Angle
V: V/T type

Connector type
M: Male
F: Female

No. of contact
2 to 13

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X. ±0.60		X. ±5°		UNITS	mm	P.C.B CONNECTOR 3.96mm VH
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES
.XX ±0.25		.XX ±2°		DS1073		
DRAWING TYPE	CUSTOMER					
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1073-XXXXX					



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD