


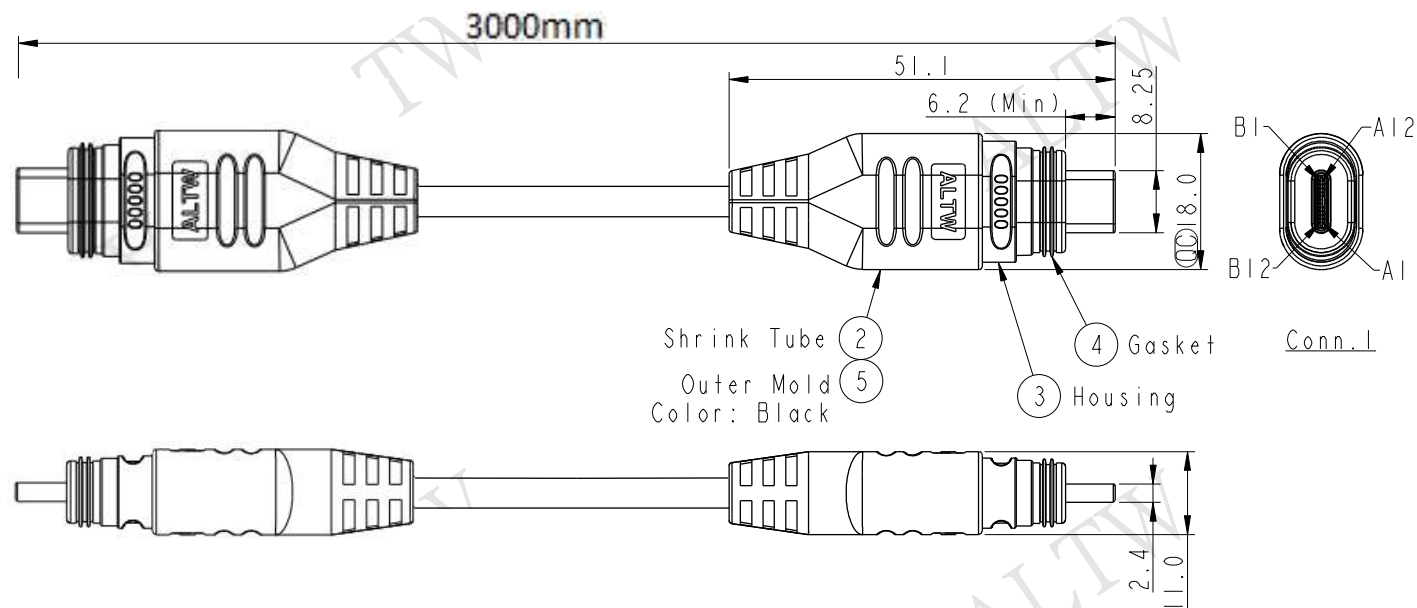


Note:

- * $\varnothing$ Important Dimension
- * Conn.1: USB Type C, Plug
- * Housing: PP, UL94 V-0, Black
- * Gasket: Silicone, Black
- * Waterproof Rate: IP68(Mated)(under water ,1M 24H)
- * Conn.2: USB Type A 3.0, Plug
- * Cable: (USB3.0) (30AWG*2C+D+A1/My)*2+32AWG*1P
+23AWG*1C+D+A1/My+B,PVC Jacket,
OD=4.0mm, Black

A1,B1,A12,B12	Drain*2地線*2		A1,B1,A12,B12
A4,B4,A9,B9	Red 紅		A4,B4,A9,B9
A5	Blue 藍		A5
B5	Yellow 黃		B5
A6	Green 綠	Twist Pair	A6
A7	White 白	對絞	A7
A2	Blue 藍	Red	B11
A3	White 白	Twist Pair	B10
GND	Drain 地線	對絞	GND
B11	Blue 藍	Red	A2
B10	White 白	Twist Pair	A3
GND	Drain 地線	對絞	GND
B2	Blue 藍	Red	A11
B3	White 白	Twist Pair	A10
GND	Drain 地線	對絞	GND
A11	Blue 藍	Red	B2
A10	White 白	Twist Pair	B3
GND	Drain 地線	對絞	GND
A8	Red 紅		B8
B8	Black 黑		A8
Shell	Braid 編織		Shell
Conn.1	Wire Color	Mylar Color	Conn.2

UNIT:mm

TOLERANCE
±0.5

TITLE

USB
TYPE C TO USB 3.0 TYPE A PLUGSCALE
1:1SIZE
A4SHEET
1 OF 1REV.
01WC-REV.
A.27

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

OTO-UC-30MM-QD8B03

DRAWN BY

DATE

DWG NO

OTO-UC-30MM-QD8B03

CHECKED BY

DATE

CUSTOMER

ALTW

APPROVED BY

DATE