

RoHS

SPECIFICATIONS

Current rating: 2A AC, DC




Voltage rating: 50V AC, DC

Temperature range: -25°C ~ +85°C

Insulation resistance: 300M Ω /min.

Withstanding voltage: 500V AC/minute

Contact resistance: 20m Ω /max

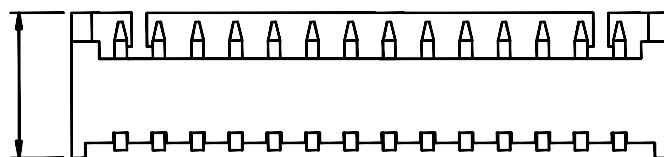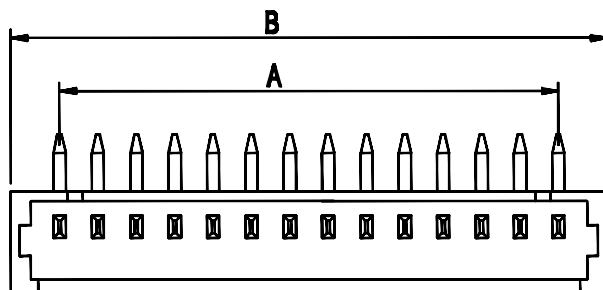

MATERIAL: BRASS/TIN-PLATED
WAFER: NYLON6T, UL94V-0
MATES WITH YSTA1250FR SERIES WAFER

标记	变更记录	版次	日期
A	初版发行	1	01/16

		A	B
2	YSTA1250FR-02P	1.25	4.25
3	YSTA1250FR-03P	2.50	5.50
4	YSTA1250FR-04P	3.75	6.75
5	YSTA1250FR-05P	5.00	8.00
6	YSTA1250FR-06P	6.25	9.25
7	YSTA1250FR-07P	7.50	10.5
8	YSTA1250FR-08P	8.75	11.75
9	YSTA1250FR-09P	10.00	13.00
10	YSTA1250FR-10P	11.25	14.25
11	YSTA1250FR-11P	12.50	15.50
12	YSTA1250FR-12P	13.75	16.75
13	YSTA1250FR-13P	15.00	18.00
14	YSTA1250FR-14P	16.25	19.25
15	YSTA1250FR-15P	17.50	20.50



图面代码	C001	规格型号	molex 1.25弯针	S
图面公差	X $\pm$ 0.15 XX $\pm$ 0.05	本司料号	YST-A1250FR-XXP	
页次	001	版本	A	单位
制图	审核	核准	生效日期	2014/01/16
蒋晓燕	张 扬	周海林	深圳市中瑞祥科技有限公司 Shenzhen City Ruixiang Technology Co., Ltd.	