







REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/08/19

NOTES:

1. Rating: 300V 15A ;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500M Ω or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. "★" is the important dimension
6. RoHS compliance

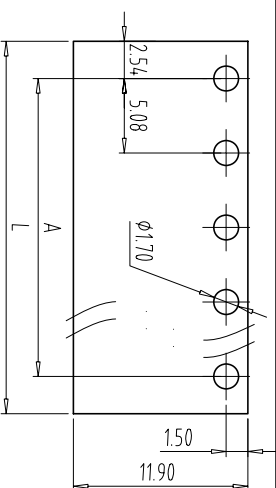

PCB LAYOUT

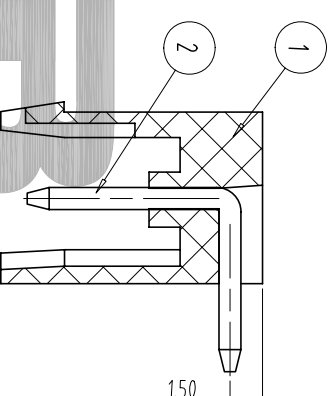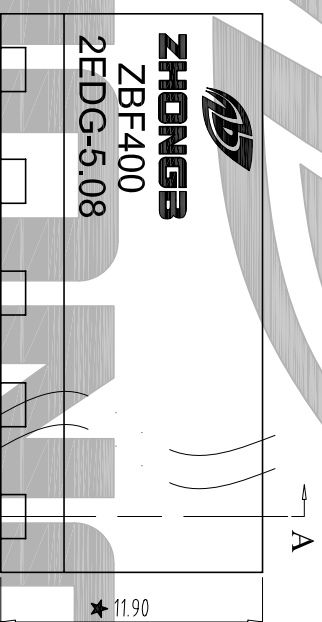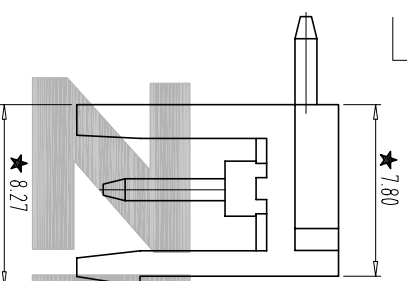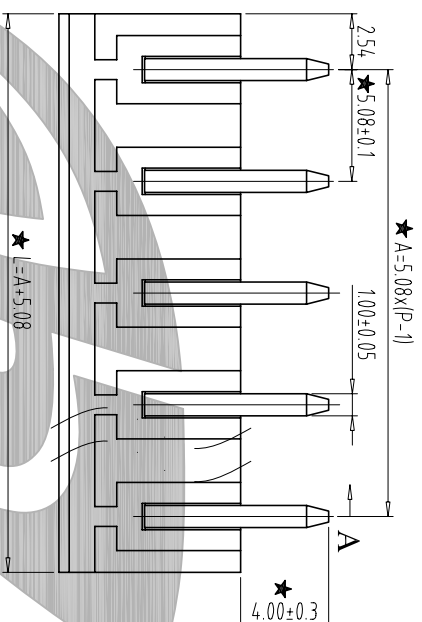

SECTION:A-A

A	Total Pitch Tolerances	Nominal dimension range	—	—	//
---	------------------------	-------------------------	---	---	----

[illegible]

2	SPLDER PIN	ZF300B0002	P	BRASS	Tin Plated
1	HOUSING	ZF4,00A0XXXXX	1	PA66	UL94 V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/08/19	SIZE	A4
CHK.		DATE		SCALE	3:1
APP.		DATE			2EDG-5,08
					
			NAME		
ZBF400R-XXP-X					