

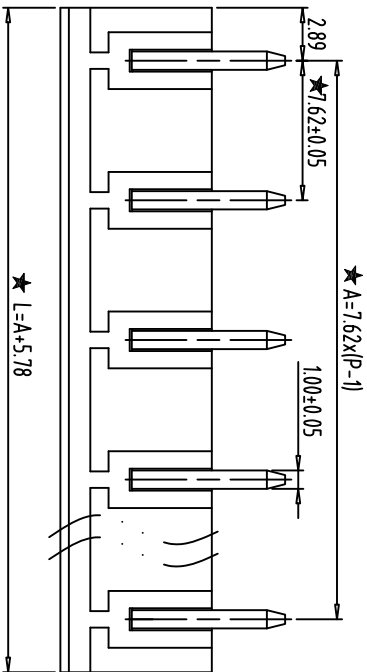




PCB LAYOUT
S=1.5:1

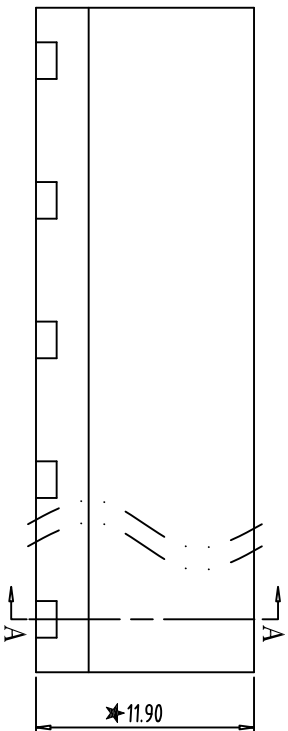

- NOTES:
1. Rating: 300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. “★” is the important dimension



SECTION:A-A

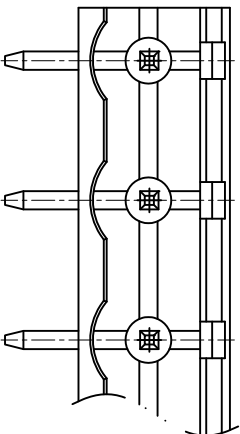

Total Pitch Tolerances										Nominal dimension range										±	≡	—	//
in mm										in mm													

over	0	to	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over	0	over
to	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	all	to	100	over
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL		NOTE			
DWG.	SK	DATE	2014/08/20	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.	DATE			SCALE	2.5:1	2EDG-7.62			
APP.	DATE	ZBF600D VMD V							



NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD

DWGNO. ZB-02-ZBF600RXXPX