


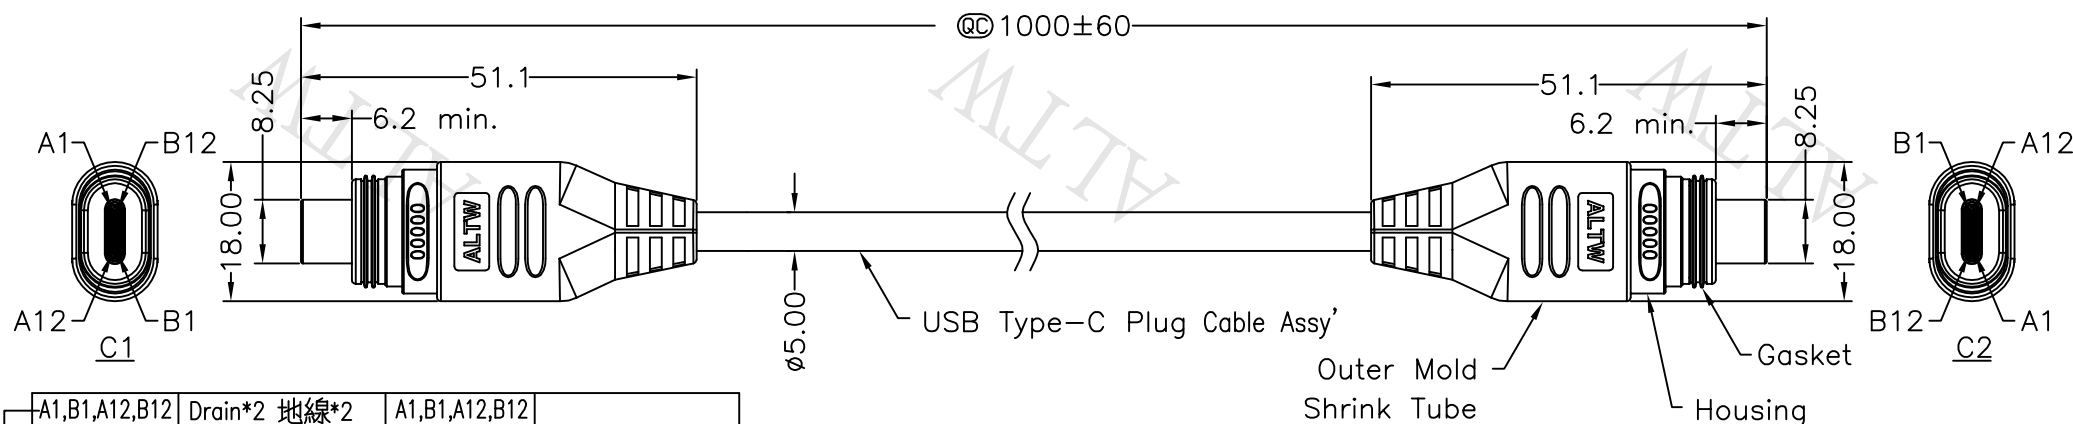

A1,B1,A12,B12	Drain*2 地線*2	A1,B1,A12,B12	
A4,B4,A9,B9	Red 紅	A4,B4,A9,B9	
A5	Blue 藍	A5	
B5		B5	
A6	Green 綠	A6	Twist Pair 對絞
A7	White 白	A7	
A2	Blue 藍	B11	Red 紅
A3	White 白	B10	Twist Pair 對絞
GND	Drain 地線	GND	
B11	Blue 藍	A2	Orange 橙
B10	White 白	A3	Twist Pair 對絞
GND	Drain 地線	GND	
B2	Blue 藍	A11	Green 綠
B3	White 白	A10	Twist Pair 對絞
GND	Drain 地線	GND	
A11	Blue 藍	B2	Blue 藍
A10	White 白	B3	Twist Pair 對絞
GND	Drain 地線	GND	
A8	Red 紅	B8	
B8	Black 黑	A8	
Shell	Braid 編織	Shell	
C1	Wire Color	C2	Mylar Color

Pin Out

Note:

- * @@ Important Dimension to Check.
- * Connector: USB3.1 Type C
- * Waterproof Rate: IP68(Mated)
(Immersion for 24 hours at a depth of 1 meter)
- * Housing: Thermoplastic, Black
- * Gasket: Thermoplastic, Black
- * Cable: UL2725 [(30AWG*1PR+EAM)*4P+(34AWG*1PR+EA)+1C*23AWG+34AWG*4C+2E]+AB, OD5.0mm, Black

UNIT:mm		TITLE USB, C TYPE, 2.0, CABLE W/SR M, M, MOLDING, QUICK
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4	QC :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO OTO-UC-30MM-QD8B01	DRAWN BY Eagle	DATE 2019/03/28
DWG NO AHC1-JAMQ0AH0013-1	CHECKED BY Brady	DATE 2019/03/28
CUSTOMER 0010000132	APPROVED BY Neo	DATE 2019/03/28