

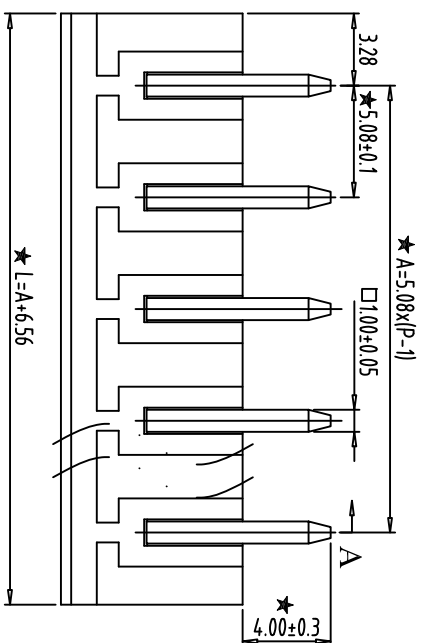
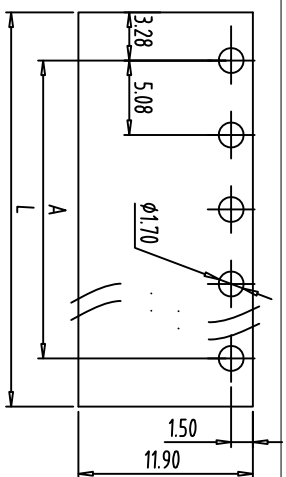

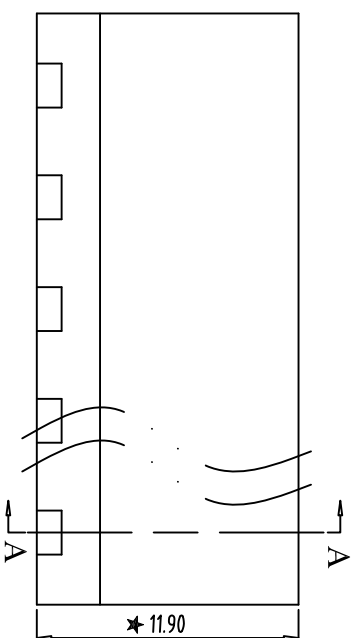


REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/08/19

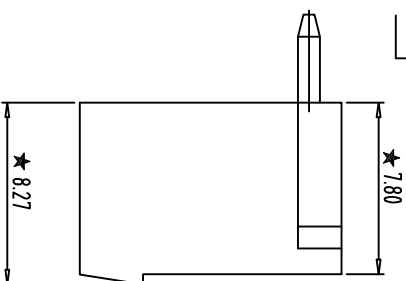

- NOTES:
1. Rating: 300V 15A ;
 2. Insulation Withstands Voltage:
AC2000V/MIN
 3. Insulation Resistance:
500M Ω or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. "★" is the important dimension
 6. RoHS compliance



SECTION:A-A

Total PRT Tolerances			Nominal dimension range			—		//	
in mm			in mm						
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	10
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.50	± 0.55	± 0.70	± 0.80
5			5			4		5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SK	DATE 2014./08./19	SIZE	A4	UNITS	mm
CHK.	DATE		SCALE	3:1		
APP.	DATE		2EDG-5.08			
 ZHONGBO		ZBF400RC-XXP-X				
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD		DWGNO	ZB-02-ZBF400RCXXP-X			
2		1				