

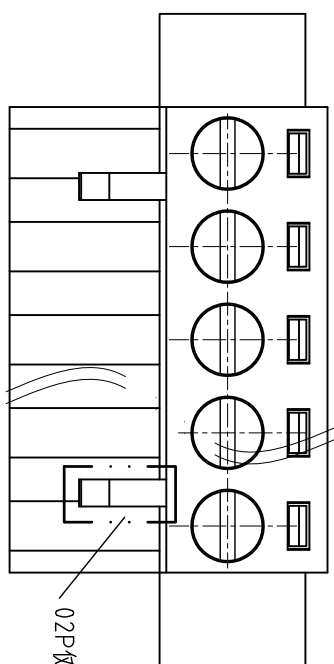
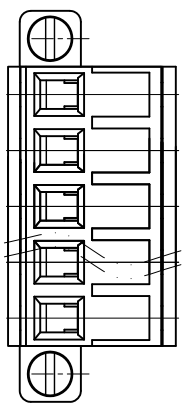
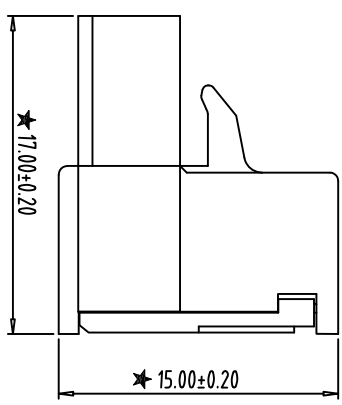


|             |  |         |  |     |  |            |  |  |  |  |  |
|-------------|--|---------|--|-----|--|------------|--|--|--|--|--|
| FILE: ZB02/ |  |         |  |     |  |            |  |  |  |  |  |
| REV         |  | CONTENT |  | CHK |  | DATE       |  |  |  |  |  |
| V0.0        |  | CONTENT |  | SK  |  | 2014/09/11 |  |  |  |  |  |

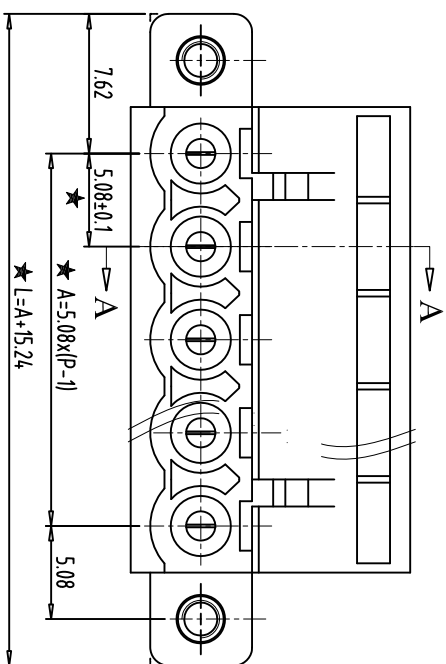

- NOTES:
1. Rating:300V 15A;
  2. Insulation Withstands Voltage: AC2000V/MIN
  3. Insulation Resistance: 500MΩ or more at DC500V
  4. Using Temperature Range: -40°C~+105°C
  5. Screw Torque Vlaue:0.4N.m
  6. Suitable Electric Wire: 28~12AWG
  7. "★" is the important dimension.



| Total Pitch Tolerances |       |      |            |                 |                                              |      |      |      |      | Nominal dimension range |      |      |      |      |      |      |      |      |      | ± | ≡ | — | // |
|------------------------|-------|------|------------|-----------------|----------------------------------------------|------|------|------|------|-------------------------|------|------|------|------|------|------|------|------|------|---|---|---|----|
| in mm                  |       |      |            |                 |                                              |      |      |      |      | in mm                   |      |      |      |      |      |      |      |      |      |   |   |   |    |
| over                   | over  | over | over       | over            | over                                         | over | over | over | over | over                    | over | over | over | over | over | over | over | over | over |   |   |   |    |
| 0                      | 30    | 53   | 70         | 90              | 115                                          | 150  | 250  | 350  | 0    | 30                      | 53   | 70   | 90   | 115  | 150  | 200  | 250  | 0    | over |   |   |   |    |
| to                     | to    | to   | to         | to              | to                                           | to   | to   | to   | to   | to                      | to   | to   | to   | to   | to   | to   | to   | to   | all  |   |   |   |    |
| 30                     | 53    | 70   | 90         | 115             | 150                                          | 250  | 350  | 500  | 30   | 53                      | 70   | 90   | 115  | 150  | 200  | 250  | 320  | 10   |      |   |   |   |    |
| ±0.18? 20              | ±0.25 | ±0.3 | ±0.35? 4.4 | ±0.60±0.70? 8.5 | ±0.20±0.25±0.30±0.35±0.4±0.55±0.70±0.80±0.90 | 0.2  | 0.3  | 0.3  | 0.2  | 0.3                     | 0.3  | 0.2  | 0.3  | 0.5  |      |      |      |      |      |   |   |   |    |

|                                                 |              |             |            |          |                      |       |    |          |           |
|-------------------------------------------------|--------------|-------------|------------|----------|----------------------|-------|----|----------|-----------|
| ITEM                                            | NAME OF PART | NO. OF PART | Q'TY       | MATERIAL | NOTE                 |       |    |          |           |
| DWG.                                            | SK           | DATE        | 2014/09/11 | SIZE     | A4                   | UNITS | mm | SHEET/OF | 1 / 1     |
| CHK                                             |              | DATE        |            | SCALE    | 2.5:1                |       |    |          | 2EDG-5.08 |
| APP.                                            |              | DATE        |            |          |                      |       |    |          |           |
|                                                 |              |             |            | NAME     | ZBK400RM-XXP-XS      |       |    |          |           |
| NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD |              |             |            | DWGNO.   | ZB-02-ZBK400RMXXPPXS |       |    |          |           |