




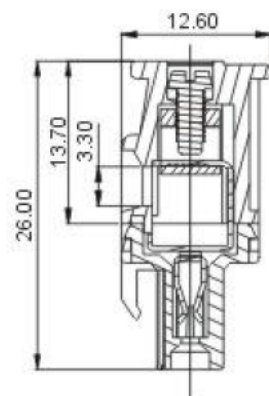



**2EDGKA-5.0**  
**2EDGKA-5.08**

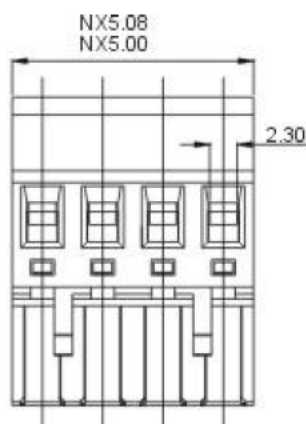

| APPROVAL             |   |                    |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>Electrical</b>    |                                                                                                                                                                         |                    |
| Standard             | <b>UL</b>                                                                                                                                                               | <b>IEC</b>         |
| Rated voltage        | 300V                                                                                                                                                                    | 320V               |
| Rated current        | 15A                                                                                                                                                                     | 10A                |
| Wire range           | 28-12AWG                                                                                                                                                                | 2.5mm <sup>2</sup> |
| Withstanding voltage | AC2500V/1Min                                                                                                                                                            |                    |
| <b>Mechanical</b>    |                                                                                                                                                                         |                    |
| Torque               | 0.4Nm(3.5Lb-In)                                                                                                                                                         |                    |
| Ambient temperature  | -40℃~+105℃                                                                                                                                                              |                    |
| Strip length         | 7mm                                                                                                                                                                     |                    |
| <b>Dimensions</b>    |                                                                                                                                                                         |                    |
| Pitch                | 5.0mm(.197" ) 5.08mm(.200" )                                                                                                                                            |                    |
| Poles                | 2P-24P                                                                                                                                                                  |                    |
| <b>Material</b>      |                                                                                                                                                                         |                    |
| Housing              | PA66,UL94 V-0                                                                                                                                                           |                    |
| Screws               | M2.5,Steel,Cr <sup>3+</sup> Zn-plated                                                                                                                                   |                    |
| Contact              | Phosphor bronze                                                                                                                                                         |                    |
| Cage                 | Brass,Ni-plated                                                                                                                                                         |                    |

### HOW TO ORDER :

|               |   |             |   |   |   |  |   |                  |          |          |
|---------------|---|-------------|---|---|---|--|---|------------------|----------|----------|
|               | - |             | P | - | 1 |  | - | X                | X        | X        |
|               |   |             |   |   |   |  |   | Customer Request |          |          |
| Series number |   | No. of pole |   |   |   |  |   | Color            |          |          |
|               |   |             |   |   |   |  |   | 1 Grey           | 4 Green  | 7 Trans  |
|               |   |             |   |   |   |  |   | 2 Blue           | 5 Orange | 8 Yellow |
|               |   |             |   |   |   |  |   | 3 Black          | 6 Red    | 9 White  |

|                                                                                       |                                                                                                                           |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
|  |  <b>DEGSON ELECTRONICS CO., LTD.</b> |
|  | <b>NAME</b><br><b>2EDGKA-5.0 2EDGKA-5.08</b>                                                                              |