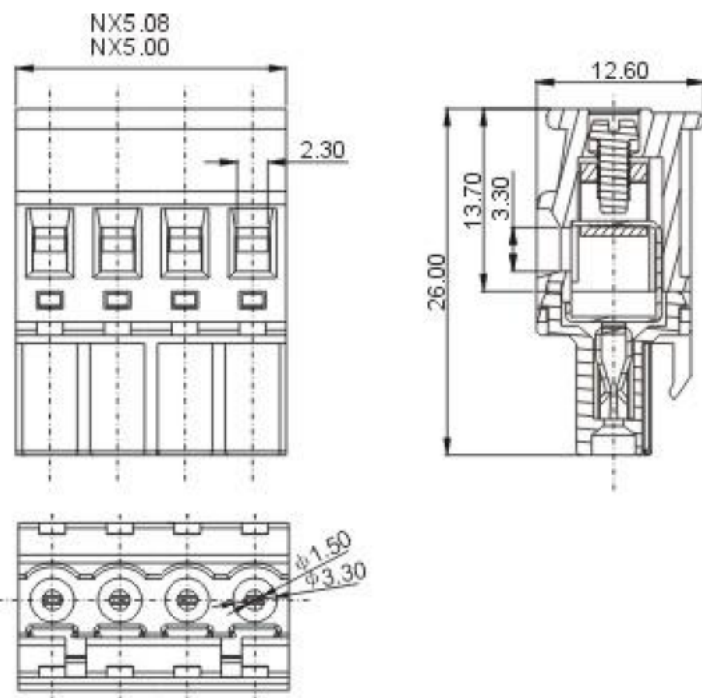






2EDGKB-5.0
2EDGKB-5.08



APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	15A	10A
Wire range	28-12AWG	2.5mm ²
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-40℃~+105℃	
Strip length	7mm	
Dimensions		
Pitch	5.0mm(.197") 5.08mm(.200")	
Poles	2P-24P	
Material		
Housing	PA66,UL94 V-0	
Screws	M2.5,Steel,Cr ³⁺ Zn-plated	
Contact	Phosphor bronze	
Cage	Brass,Ni-plated	

HOW TO ORDER :

	-		P	-	1	-	X	X	X	Customer Request
Series number		No. of pole					Color			
							1 Grey	4 Green	7 Trans Parent	
							2 Blue	5 Orange	8 Yellow	
							3 Black	6 Red	9 White	

 	 DEGSON ELECTRONICS CO., LTD. NAME 2EDGKB-5.0 2EDGKB-5.08
--	---