

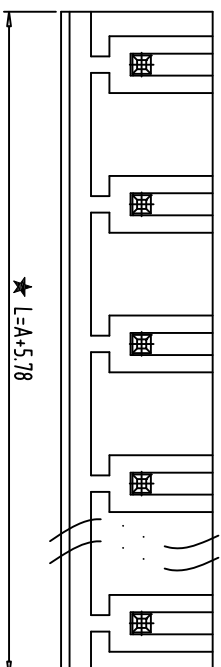




PCB LAYOUT
S=1.5:1

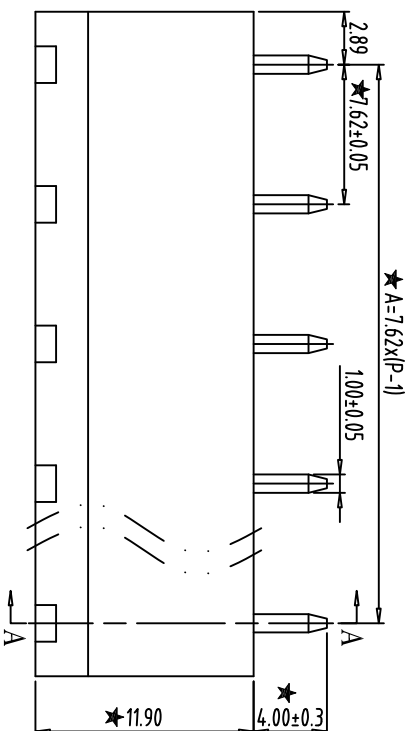

- NOTES:
1. Rating: 300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500M Ω or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. "★" is the important dimension

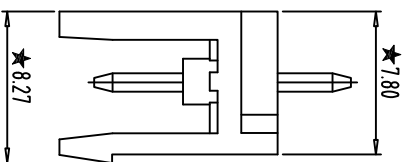

SECTION:A-A

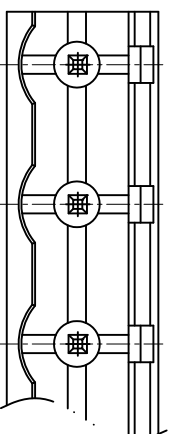

Total PIR				Tolerances				Nominal dimension range				—		//	
				in mm				in mm				—		//	
0	over	over	over	0	over	over	over	0	over	over	over	0	over	0	over
0	to	to	to	0	to	to	to	0	to	to	to	0	to	0	to
30	53	70	90	15	150	250	350	30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350	30	53	70	90	115	150	200	250
0.18±0.20	0.25±0.3	0.35±0.44	0.60±0.70	0.85±0.20	0.25±0.30	0.35±0.44	0.55±0.70	0.80±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5

2	SOLDER PIN	ZF300B0001	P	BRASS	Tin Plated
1	HOUSING	ZF600A0XXXX	1	PAGE	UL94 V-0
ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/08/20	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	2.5:1 ZEDG-7.62
APP.		DATE			
 ZHONGB					
			NAME		
			ZBF600V-XXP-X		
NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD					
DWGNO1					
ZB-02-ZBF600VXXPX					