
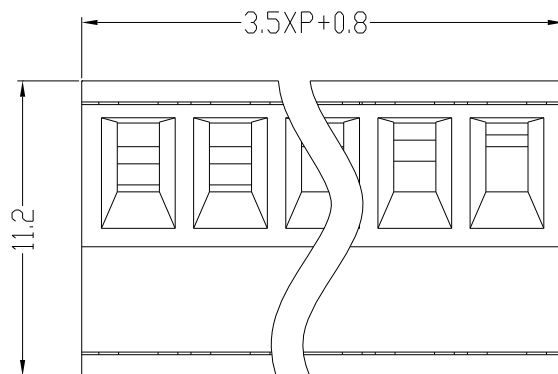
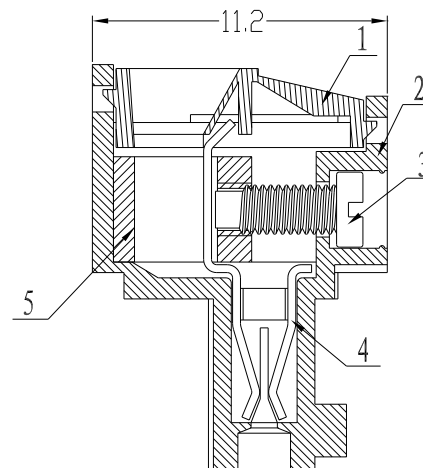
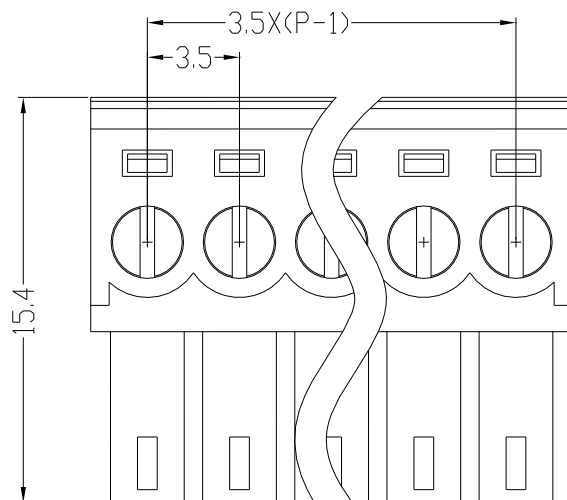




125V 8A 1.5mm²
Poles: 2-14P
Pitch: 3.5mm

Materials
Housing: PA66
Wire Cage: Brass, Nickel Plated
Clamp: Phosphor Bronze, Tin Plated
Screw: M2.0, Steel (Q235), Zinc plated

序号/RevNo.	名称/Title	文件编号/File No.
1	XY2500F-G 塑料后盖	
2	XY2500F-G 塑料主体	
3	XY2500F-C 螺丝	
4	XY2500F-C 端子	
5	XY2500F-C 铜方块	

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance		
				x. ±0.2	x.° ±2°	
新亚电子 XINYA M&E CO.,LTD		图名 /Title	文件编号/File No.	.x ±0.1	.x° ±1°	
		XY2500F-G (3.5) 产品图		.xx ±0.05	.xx° ±0.5°	
			页序 /Sheet		.xxx ±0.01	
				备注 /Remark		单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------