

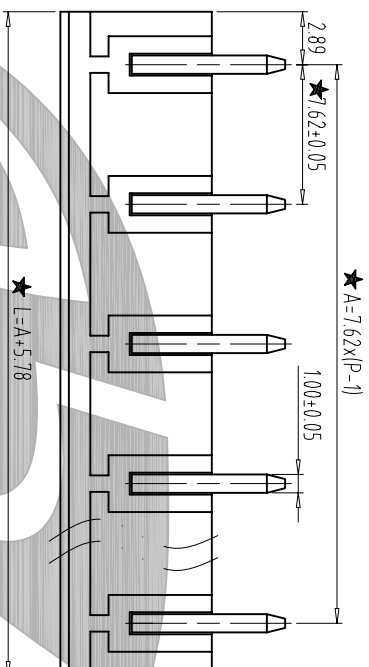
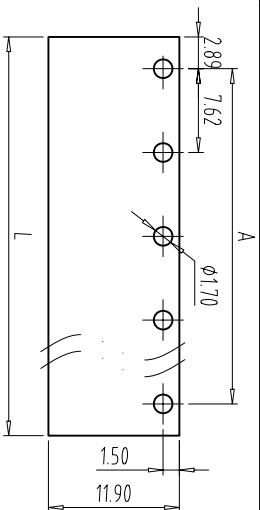
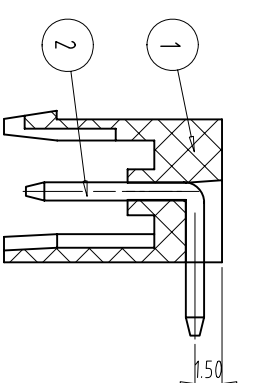


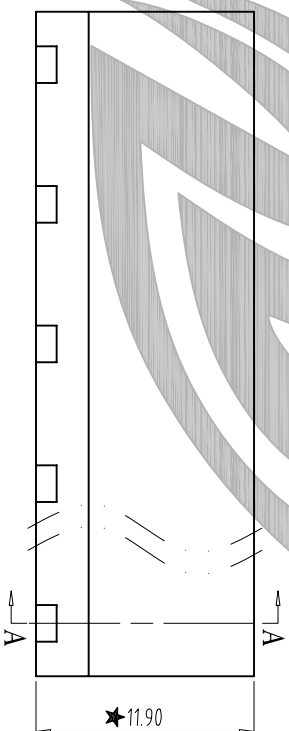


NOTES:

1. Rating: 300V 15A ;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500M Ω or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. "★" is the important dimension



SECTION:A-A

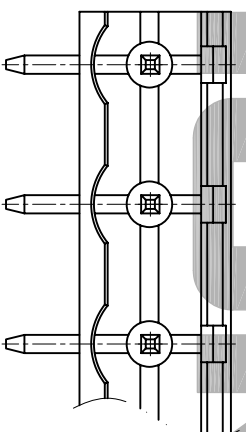

Total PH tolerances				Nominal dimension range				—		//	
in mm				in mm							
0	over	0	over	0	over	0	over	0	over	0	over
0	30	53	70	90	115	150	200	250	0	100	over
to	to	to	to	to	to	to	to	to	to	to	150
to	to	to	to	to	to	to	to	to	all	to	to
30	53	70	90	115	150	250	350	30	53	70	90
53	70	90	115	150	250	350	500	30	53	70	90
70	90	115	150	250	350	500	30	53	70	90	115
90	115	150	250	350	500	30	53	70	90	115	150
115	150	250	350	500	30	53	70	90	115	150	200
150	250	350	500	30	53	70	90	115	150	200	250
250	350	500	30	53	70	90	115	150	200	250	320
350	500	30	53	70	90	115	150	200	250	320	10
500	30	53	70	90	115	150	200	250	320	10	100
0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.60	+0.70	+0.85	+0.20	+0.25	+0.30
+0.35	+0.44	+0.60	+0.70	+0.85	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70
+0.70	+0.80	+0.90	0.2	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.5

2	SOLDER PIN	ZF300B0002	P	BRASS	Tin Plated
1	HOUSING	ZF600A0XXXXX	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/08/20	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	2.5:1 ZEDG-7.62
APP.		DATE			
 ZHONGBO					
			NAME		
			ZBF600R-XXP-X		
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD			DWGNO. ZB-02-ZBF600RXXPX		