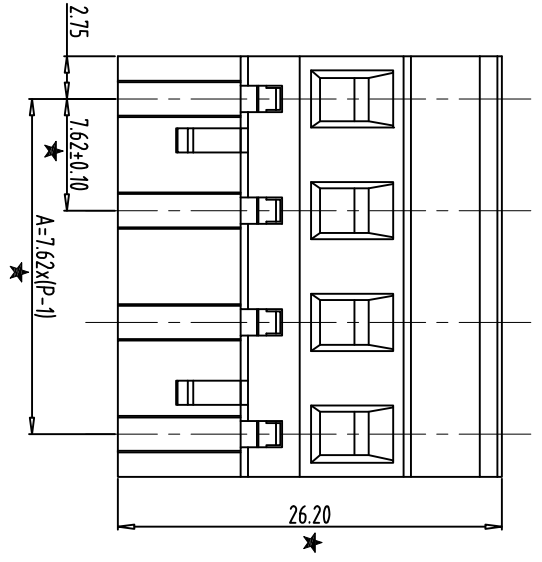
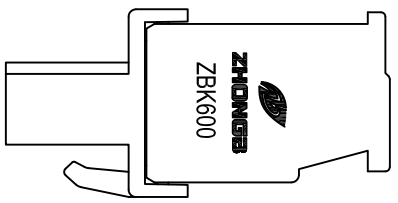
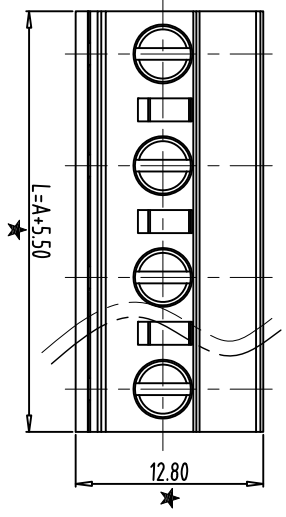


- NOTES:
1. Rating: 300V 15A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40° C/+105° C
 5. Screw Torque Value: 0.4N·m
 6. Suitable Electric Wire: 28~12AWG
 7. "★" is the important dimension.

A		Total Pitch Tolerances												Nominal dimension range												—		—		—		—									
		in mm												in mm																											
over	0	over	53	over	70	over	90	over	115	over	150	over	250	over	350	over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	200	over	250	over	320	over	0	over	100	over	150
to	30	to	70	to	90	to	115	to	150	to	250	to	350	to	500	to	0	to	30	to	53	to	70	to	90	to	115	to	150	to	200	to	250	to	320	to	10	to	100	to	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.5												

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE
DWG.	ZX	DATE	2020.04.28		SIZE	A4	UNITS	mm
CHK.		DATE			SCALE	2.5:1	2EDGKA-7.62	
APP.		DATE			NAME	ZBK600A-XXP-XS		
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD					DWGNO.	ZB-01-ZBK600AXXPXS		