






REV	CONTENT	CHK	DATE
V0.1	修改公差	CXL	15.04.20

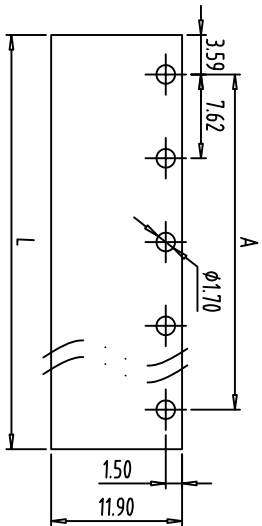


PCB LAYOUT
S=1.5:1

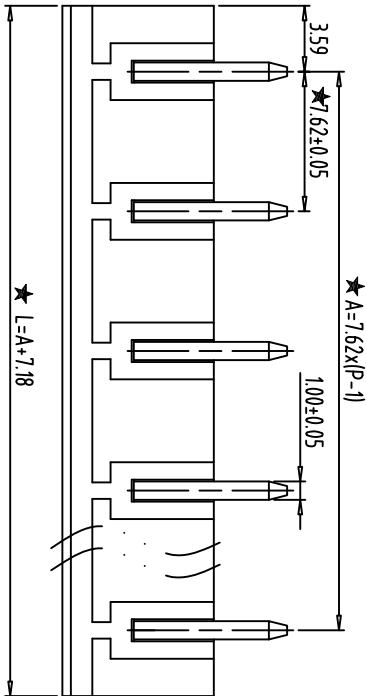

- NOTES:
1. Rating: 300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. "★" is the important dimension

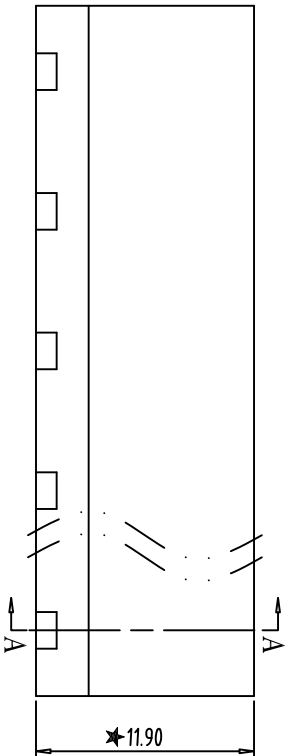

SECTION:A-A

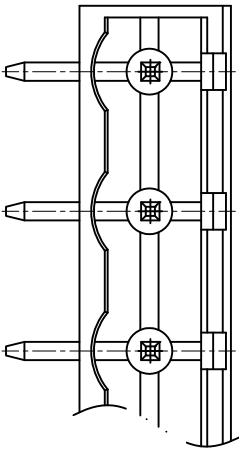

Total Pitch Tolerances in mm										Nominal dimension range in mm										T	≡	—	//		
over	0	30	53	70	90	115	150	250	350	over	0	30	53	70	90	115	150	200	250	0	over	0	100	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	150	
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	100	150	0.2	0.3	0.2	0.3	0.5
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		

2	SOLDER PIN	ZF300B0002	P	BRASS	Tin Plated				
1	HOUSING	ZF600A1XXXX	1	PA66	UL94V-0				
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE				
DWG.	SK	DATE	2014/08/20	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	2.5:1	2EDG-7.62			
APP.		DATE		NAME	ZBF600RC-XXP-X				
 ZHONGBO									
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD						DWGNO. ZB-02-ZBF600RCXXPX			