



REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014-12-08

NOTES:


1. Rating:300V 15A;
2. Insulation Withstands Voltage:
AC2000V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. Screw Torque Value:0.4N.m
6. Suitable Electric Wire: 28~12AWG
7. "★" is the important dimension.

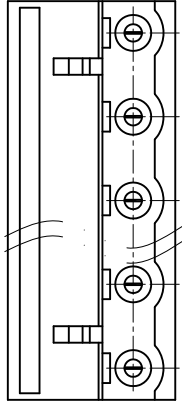




02P 依此卡勾

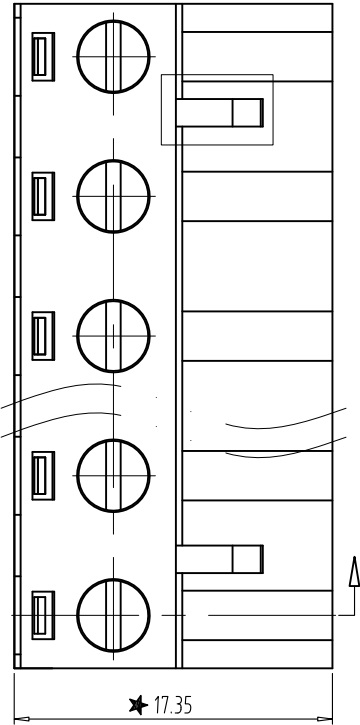

★ L=A+5.78

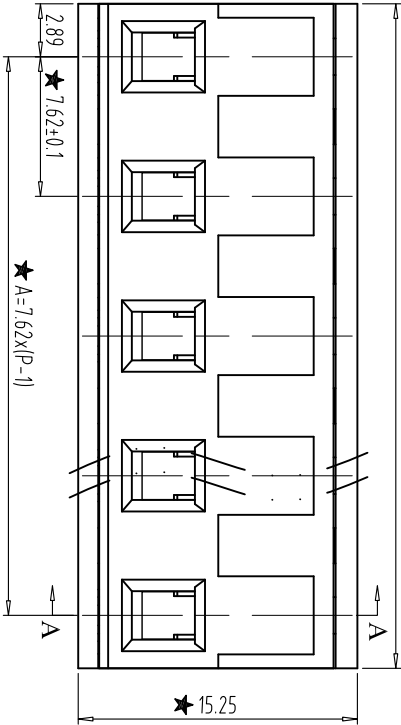

SECTION:A-A



A		Total Pitch Tolerances												Nominal dimension range												T		≡		—		//										
		in mm												in mm																												
over	0	over	30	over	70	over	90	over	115	over	150	over	250	over	350	over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	200	over	250	over	0	over	10	all	0	100	over	150
to	30	to	70	to	90	to	115	to	150	to	250	to	350	to	0	to	30	to	53	to	70	to	90	to	115	to	150	to	200	to	250	to	0	to	10	to	100	to	150			
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.2	0.3	0.5																	
		6												5												4																

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE			
DWG.	SK	DATE	2014-12-08	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	2.5:1				7.62
APP.		DATE		NAME	ZBK600R-XXP-XS				

**ZHONGB**

NINGBO ZHONGB PHOTOVOLTALIC TECHNOLOGY CO., LTD

DWGNO1

ZB-02-ZBK600RXXPXS

2

1

A