






6		5		4		3		2		1			
FILE: ZB02/						REV		CONTENT		CHK		DATE	
						V0.0		CONTENT		SK		2014-12-08	

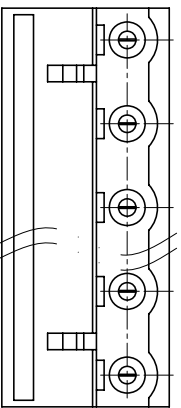

02P 仅此卡角

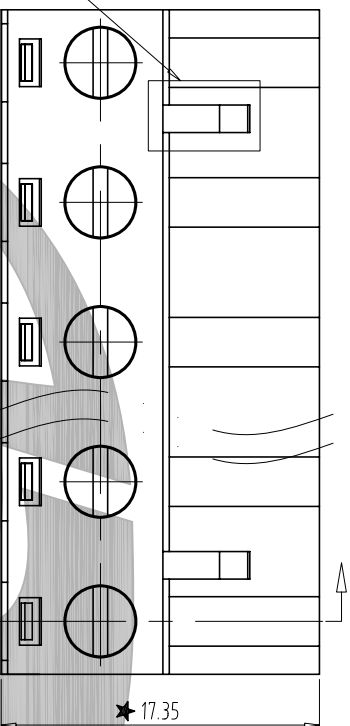

- NOTES:
1. Rating: 300V 15A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. Screw Torque Value: 0.4N.m
 6. Suitable Electric Wire: 28~12AWG
 7. "★" is the important dimension.

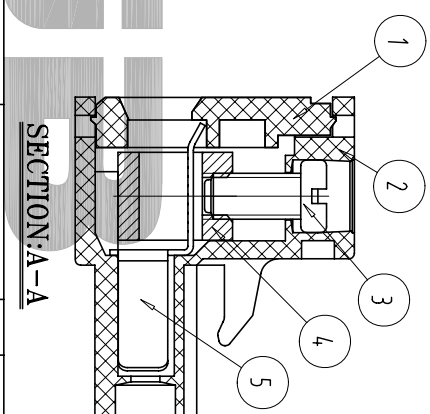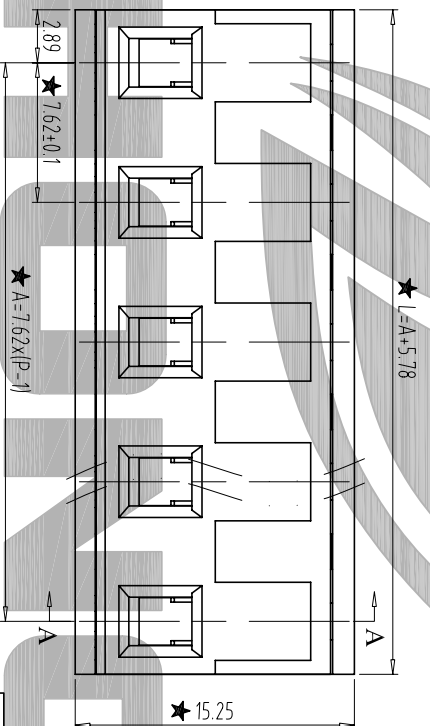

A		Total Pitch Tolerances												Nominal dimension range												—		—		//													
		in mm												in mm																													
over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	250	over	350	over	0	over	30	over	53	over	70	over	90	over	115	over	150	over	250	over	320	over	10	over	100	over	150		
to	30	to	53	to	70	to	90	to	115	to	150	to	250	to	350	to	0	to	0	to	30	to	53	to	70	to	90	to	115	to	150	to	200	to	250	to	320	to	10	to	100	to	150
30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	10	all	100	150	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.5													

5	CLAMP	ZK400C0001		P	BRONZE	Ni Plated			
4	BLOCK	ZBXCC0001		P	BRASS	Ni Plated			
3	SCREW	ZBST0023		P	STEEL	M2.5/Zn Plated			
2	HOUSING	ZK500A0XXXX		1	PA66	/			
1	COVER	ZK500A2XXXX		1	PA66	/			
ITEM	NAME OF PART	NO. OF PART		Q'TY	MATERIAL	NOTE			
DWG.	SK	DATE	2014-12-08	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK		DATE		SCALE	2.5:1	7.62			
APP.		DATE							
 ZHONGBO				NAME	ZBK600R-XXP-XS				
NINGBO ZHONGBO PHOTOVOLTALIC TECHNOLOGY CO., LTD				DWGN0.	ZB-02-ZBK600RXXPXS				