
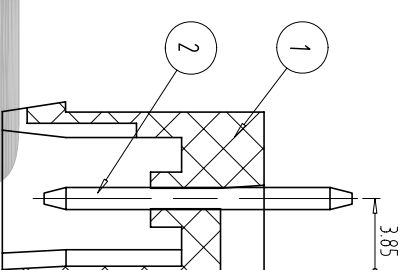
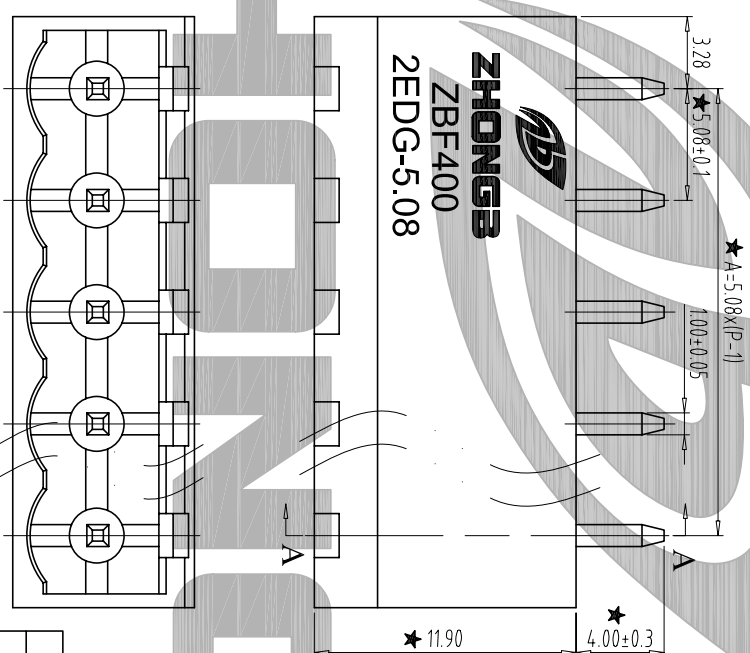
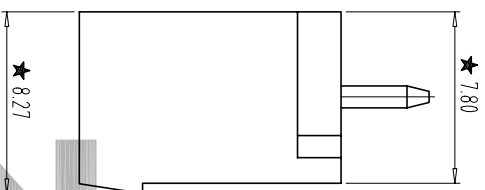
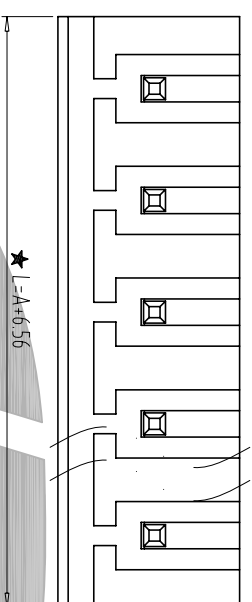


REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/08/19

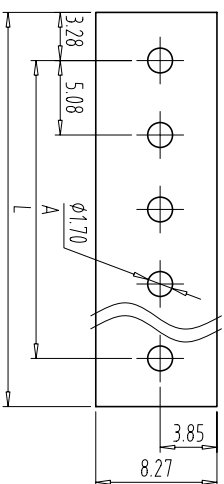

- NOTES:
1. Rating: 300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500M Ω or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. ★ " is the important dimension
 6. RoHS compliance

A	Total Pitch Tolerances	Nominal dimension range	—	—	//
---	------------------------	-------------------------	---	---	----

	over	over	in mm	over	over	over	over	over	over	in mm	over	over	over	over	over	—	—	over	over	/
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	250	0	over	0	100 over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to 150
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	100	150
+0.78/-0.20	+0.25	+0.3	+0.35/+0.44	-0.60/+0.70	-0.85/+0.20	+0.25/+0.30	+0.35/+0.44	+0.55/+0.70	+0.80/-0.90	0.2	0.3	0.2	0.3	0.5						

2	SPLDER PIN	ZF300B0001	P	BRASS	Tin Plated
1	HOUSING	ZF400A1XXXX	1	PAG6	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/08/19	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	3:1 2EDG-5.08
APP.		DATE			
 ZHONGBO			NAME		
			ZBF400V/C-XXP-X		
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD			DWGNO		
			ZB-02-ZBF400VCCXXPX		