







REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014/08/19

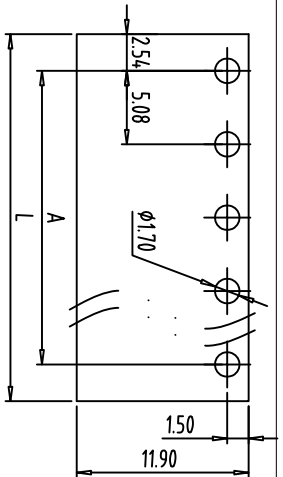

PCB LAYOUT
S=2:1

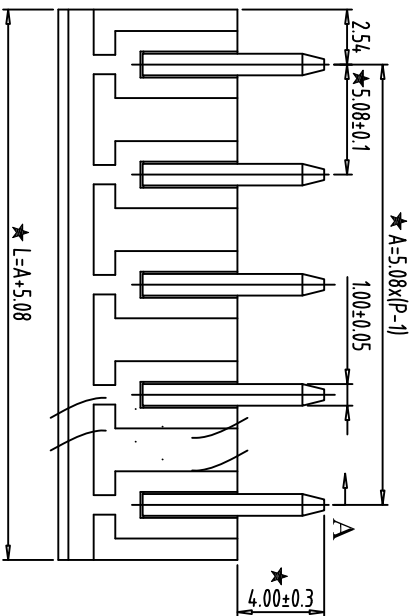

- NOTES:
1. Rating:300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40℃~+105℃
 5. "★" is the important dimension
 6. RoHS compliance

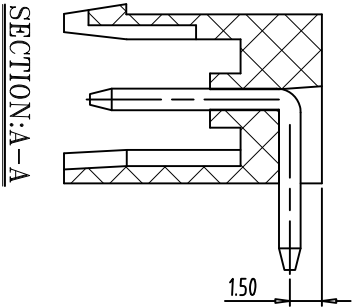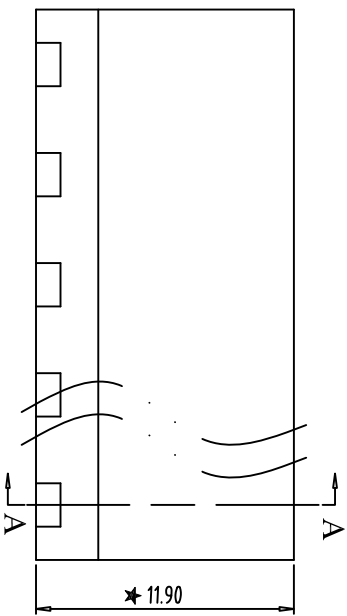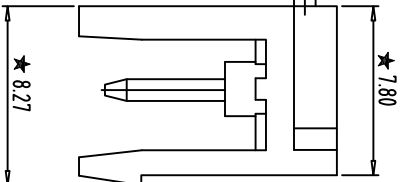

SECTION:A-A

Total Pitch Tolerances		Nominal dimension range													
in mm		in mm												—	//

over	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	100	150	over

±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
-------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-----	-----	-----	-----	-----	-----

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014/08/19	SIZE	A4
CHK.	DATE	SCALE	3:1	SHEET/OF	1/1
APP.	DATE	NAME	ZBF400R-XXP-X		



NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD