






REV	CONTENT	CHK	DATE
V0.1	修改公差	CXL	15.04.20

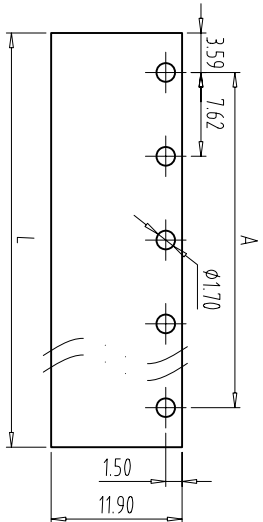

PCB LAYOUT
S=1.5:1

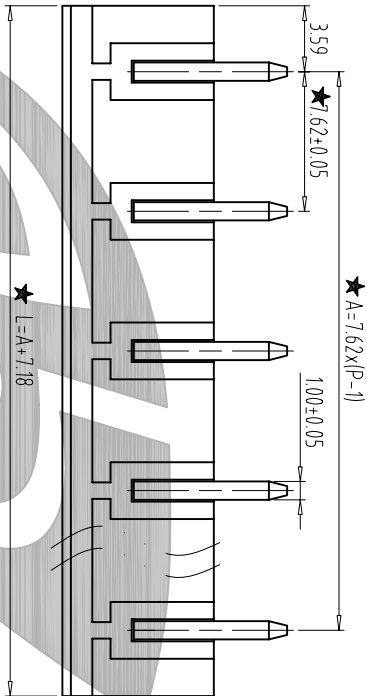


- NOTES:
1. Rating: 300V 15A ;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. "★" is the important dimension

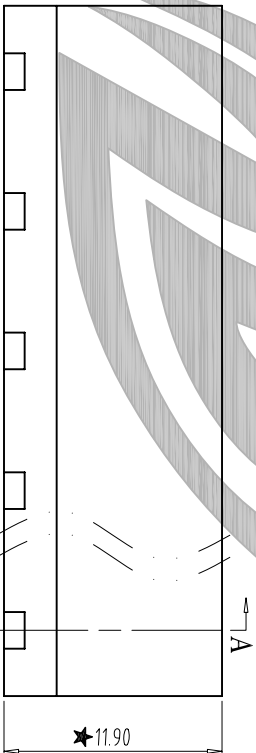

★8.27

SECTION:A-A

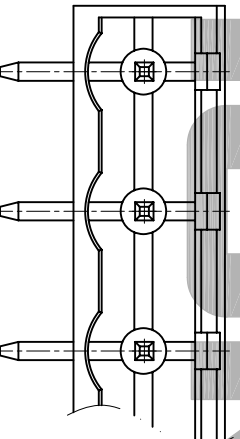

Total Pitch Tolerances												Nominal dimension range												Tolerance			
in mm												in mm															

over		over		10 min		over		over		over		10 min		over		over		over		over		over		over		over		over		over	
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over	0	100	over	0	100	over	0	100	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	all	to	to	to	100	150							
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5								

2	SOLDER PIN	ZF300B0002	P	BRASS		Tin Plated
1	HOUSING	ZF600A1XXXX	1	PA66		UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SK	DATE	2014/08/20	SIZE	A4	UNITS mm
CHK		DATE		SCALE	2.5:1	SHEET/OF 1/1
APP.		DATE		NAME	ZBF600RC-XXP-X	