


Dept Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1


The information provided herein is from CONNLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNLY or its affiliates. Unauthorized use or reproduction of this document for any purpose without the prior written permission of CONNLY is strictly prohibited. CONNLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Female Terminal




Female Housing

Male

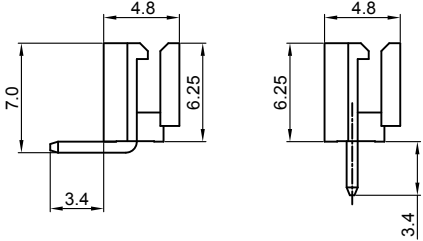

Male R/A type


Male V/T type

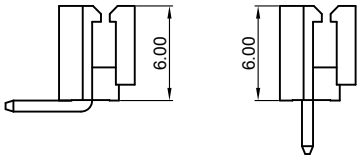

FOR 2P ONLY

T - DS1069-03 - S C 6 0 0

Contact Plating
6: Tin

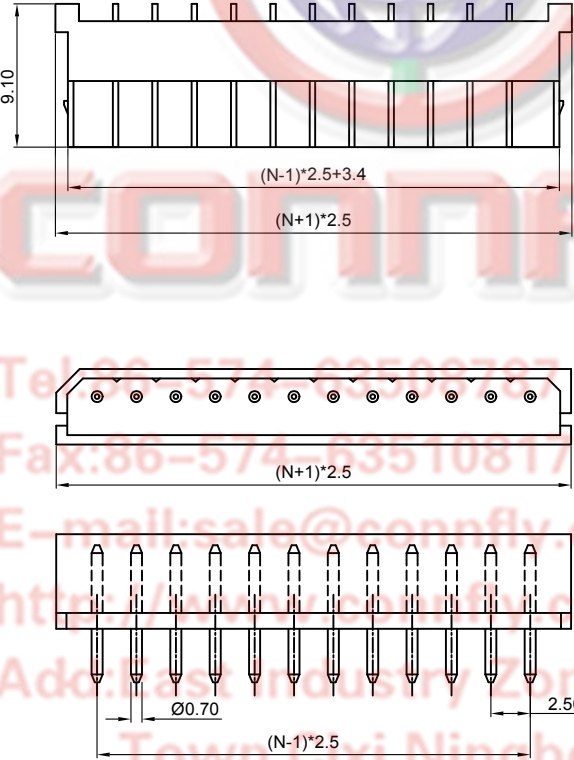

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/22/06'		LJC 07/22/06'
D	DRAWING UPDATE	JLZ 10/25/19'		

NOTES:

1. SPECIFICATIONS

- . Housing material: NYLON 66
- . Wire range: AWG#30~#22
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance: 30mΩ Max
- . Insulation resistance: 1000MΩ Min
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: -25 ~ +85°C
- . Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

DS1069-03 - X X X X X
Contact Plating
6: Tin
8: Full gold flash
Housing Color
R: Red U: Blue V: Ivory
W: White Y: Yellow
Mounting type
V: V/T
R: R/A
Connector type
M: Male
No. of contact
2 to 16
I - DS1069-03 - S C X 0 X
No. of holes
02~16
Housing Color
W: White

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	P.C.B CONNECTOR		
X.	±0.60	X.	±5°	UNITS	mm		2.5mm 5264 TYPE		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1069-03 SERIES		
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1069-03-XXXXX-D							