

REV.	DESCRIPTION	APPD	DATE

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

2.PLATING:

UNDERPLATE: NICKEL.

CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE

订购须知






TFWF1-EBXX-1X0X

S1 接触区域镀金
F1 全部区域镀金

1 卷带包装
3 PS盘包装

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

PART NO: TFWF1-EBXX-1X0X		MATERIAL:	
LOT NO: 11XX00011X		FINISH:	
UNIT: MM	SIZE: A4	COLOR:	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		DR: PENTUM 0826'09	TITLE: T-FLASH 外焊 PUSH (手机版)
GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		CHK:	
		APP:	
		DWG NO: FP-090012	REV: B/1
		SCALE: 1:1	SHEET: 1 OF 3

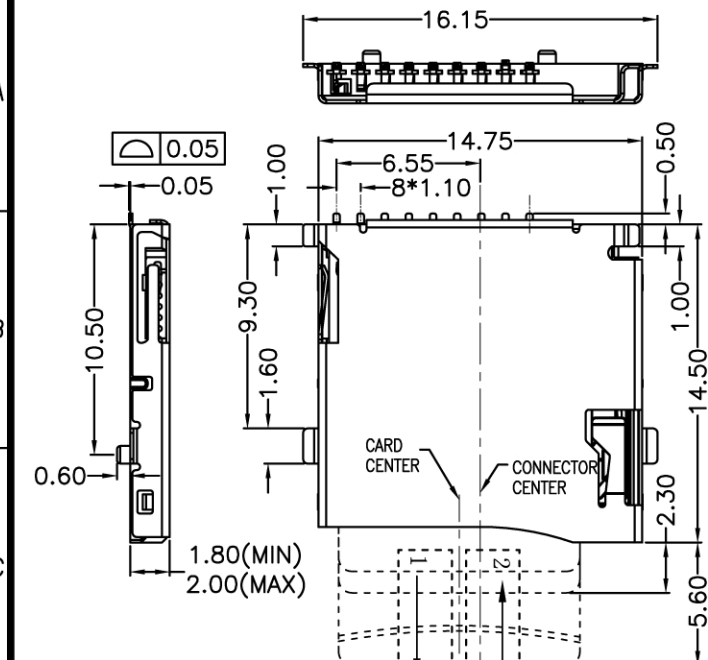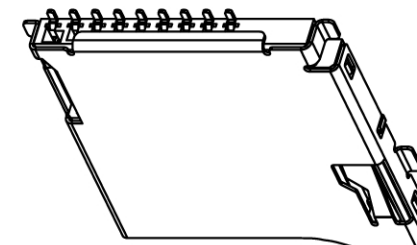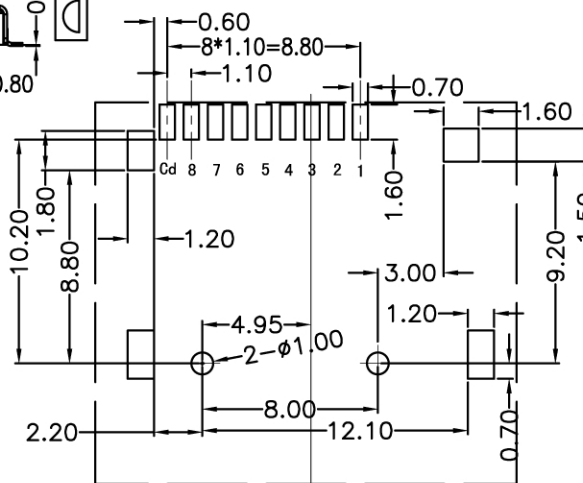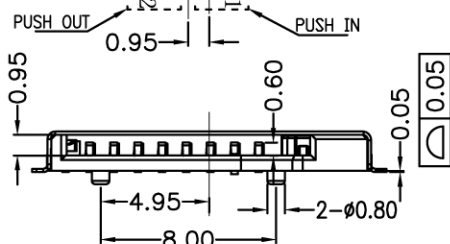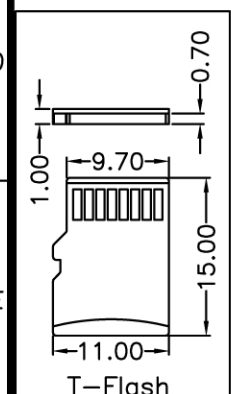

PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)